
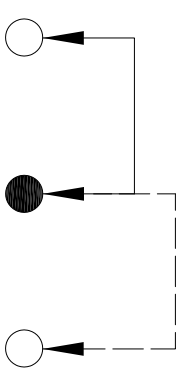

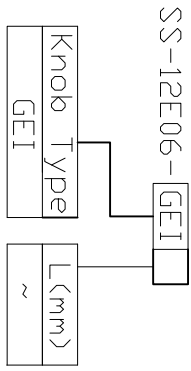
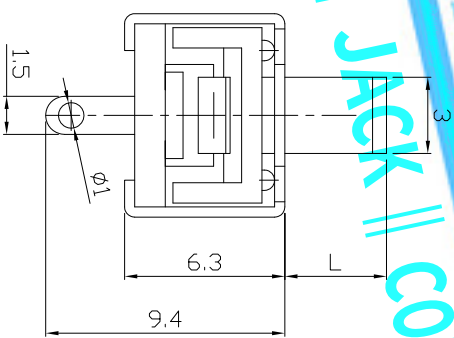


DIMENSIONS

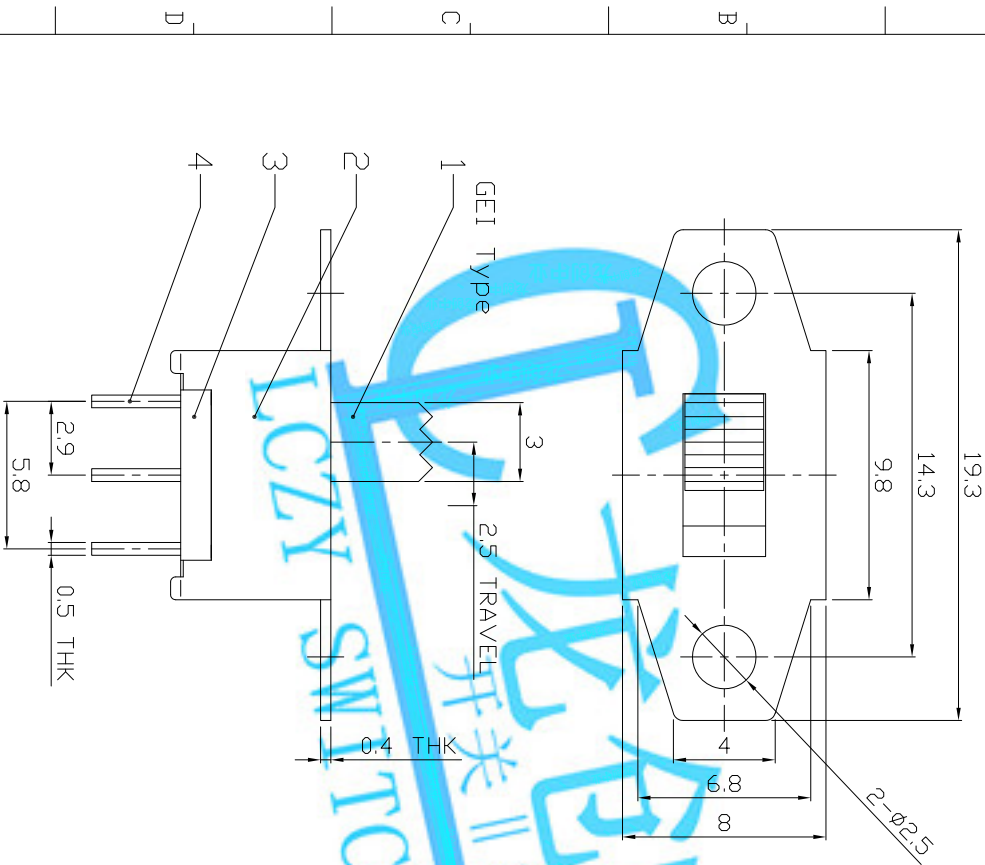

MODEL CODE

SS-12E06-GEI

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	1A 250V AC / 2A 125V AC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.5mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL	SEE NOTE	MAT'L				
6	CONTACT	COPPER STRIP	1	Ag PLATED	SEE NOTE	FINISH				
5	TERMINAL	BRASS STRIP	3	Ag PLATED	SEE NOTE	DR: <i>Rocky</i> 2016/02/17				
4	BASE	PHENOLIC RESIN	1	BLACK	SEE NOTE	CHKD: <i>Rocky</i> 2016/02/17				
3	FRAME	STEEL STRIP	1	NI PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	PART NO.: SS-12E06			
2	KNDB	9T	1	BLACK		APPD:				
1	PARTS	MATERIAL	Q'TY	FINISHING		SCALE				
1						SHEET	DWG NO.: ADL-12E06			
1						1/1				
1						A				
1							CUSTOMER DRAWING			
1										
1										