


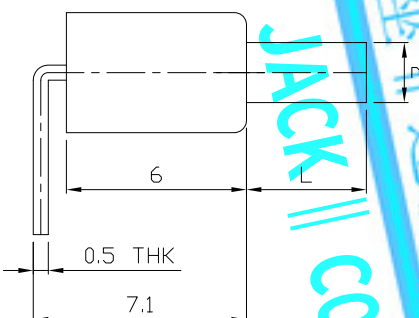
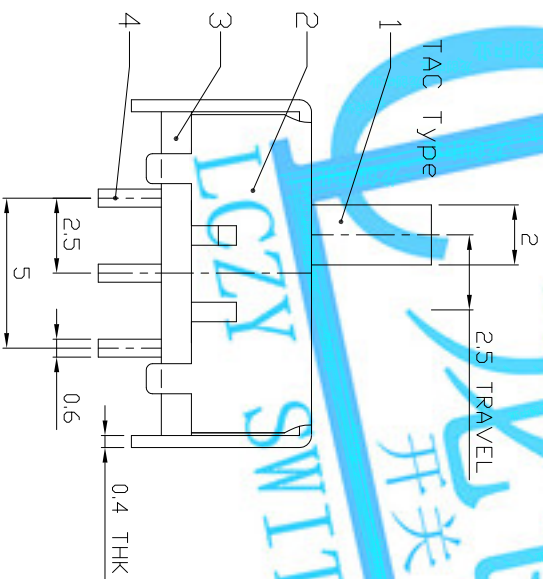


DIMENSIONS

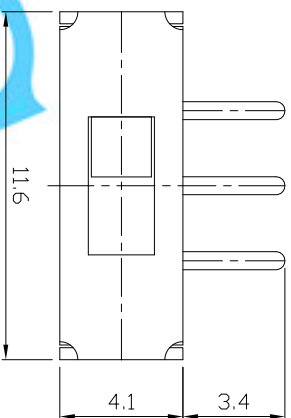

MODEL CODE

SS-12E21-TAC

Knob Type	$L_{(mm)}$
TAC	$\sim$

$$\overline{\langle m m \rangle}$$

TAC

P.C.B LAYOUT
BOTTOM VIEW

BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO:							
SLIDE SWITCH / VERTICAL		SS-12E21							
DR: Rocky 2015/07/07		DWG NO: ADL-12E21							
CHKD: Rocky 2015/07/07		SCALE SHEET REV.							
APPD:		4:1				1/1		A	
CUSTO		DRAWING							
UNIT: mm									
MAT'L									
OVER 1.5mm: ±0.2mm									
SEE NOTE									
FINISH									
SEE NOTE									
Q'TY									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE. INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
Q'TY									
FINISHING									
MATERIAL									
PARTS									
NO.									
1		KNOB							
2		FRAME							
3		BASE							
4		TERMINAL							
5		CONTACT CLIP							
6									
7									
8									

LONGCHUANG ZHONGYE (HK) CO., LIMITED