
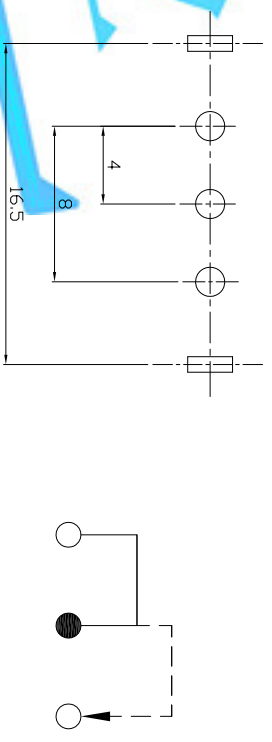
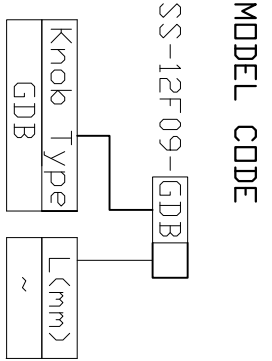
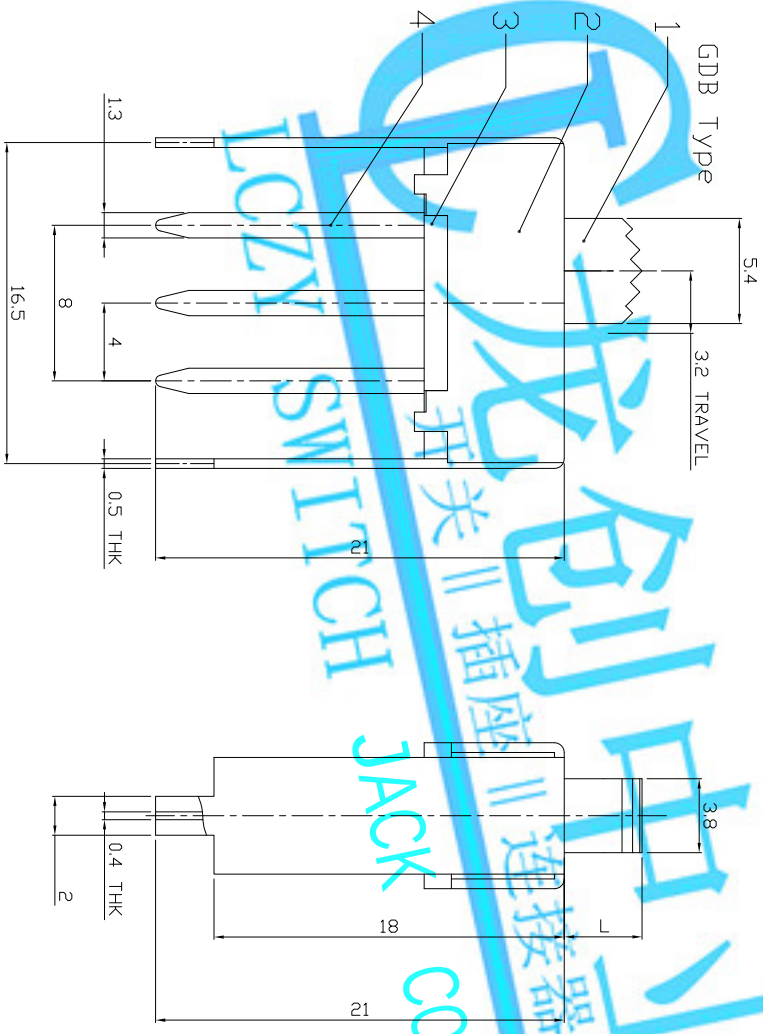


DIMENSIONS

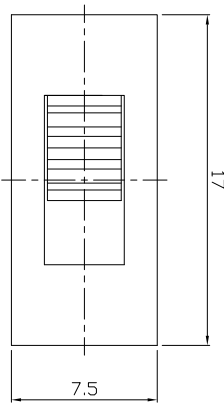

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	SPRING	STEEL WIRE	1	NATURAL			SEE NOTE				
5	CONTACT	BRASS STRIP	1	AG PLATED							
4	TERMINAL	BRASS STRIP	3	AG PLATED			FINISH	TITLE: SLIDE SWITCH / VERTICAL			
3	BASE	PHENOLIC RESIN	1	BLACK			SEE NOTE				
2	FRAME	STEEL STRIP	1	NI PLATED			DR: 2015/07/07				
1	KNDB	PDM	1	BLACK			CHKD: 2015/07/07				
ND.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	DWG NO: ADL-12F09	SCALE SHEET	REV.	CUSTOMER DRAWING
								2/1	1/1	A	