

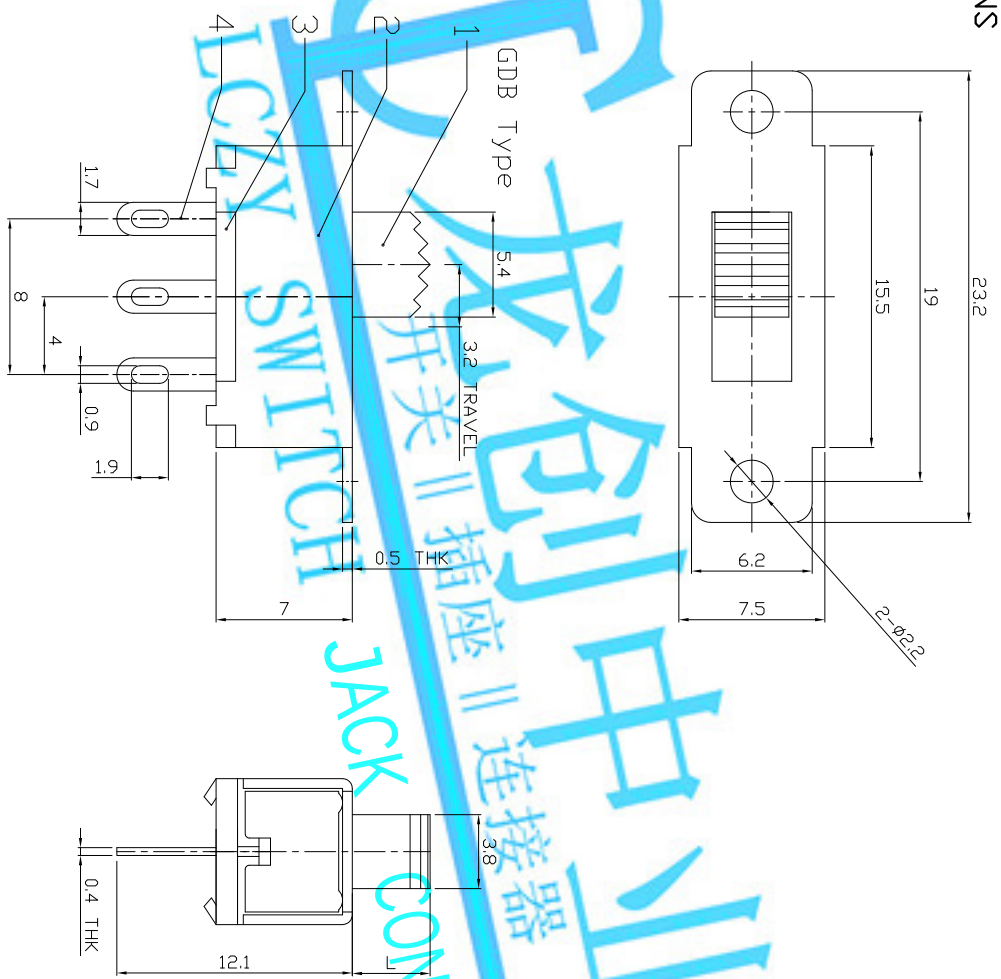


DIMENSIONS



MODEL CODE

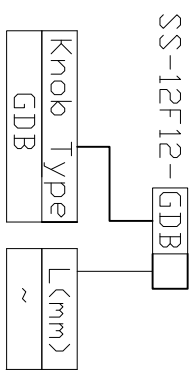

PC.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
7				OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE	
6	SPRING	STEEL WIRE	1	NATURAL	FINISH	SEE NOTE	
5	CONTACT	BRASS STRIP	1	AG PLATED	SEE NOTE	DR: 2015/07/08	
4	TERMINAL	BRASS STRIP	3	AG PLATED	SEE NOTE	CHKD: 2015/07/08	
3	BASE	PHENOLIC RESIN	1	NATURAL	APPD:	SCALE 2:1	
2	FRAME	STEEL STRIP	1	BLACK		1/1	
1	KNOB	POM	1	BLACK		A	
ND.	PARTS	MATERIAL	Q'TY	FINISHING			