





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS




MODEL CODE


SS-12F46-GBG

Knob Type
GBG
VAA



L(mm)
~



P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

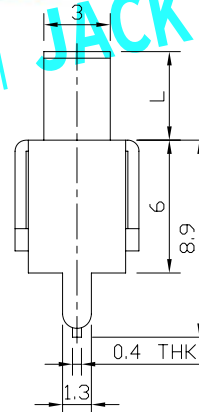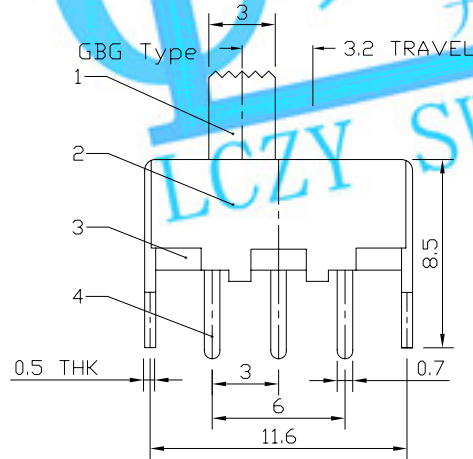

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE:	SLIDE SWITCH / VERTICAL			
5	CONTACT	BRASS STRIP	1	Ag PLATED			PART NO.:	SS-12F46			
4	TERMINAL	BRASS STRIP	3	Ag PLATED			DR:	Ricky 2015/05/25			
3	CASE	PHENOLIC RESIN	1	NATURAL			DWG NO.:	ADL-12F46			
2	FRAME	STEEL STRIP	1	Ni PLATED			CHKD:	Ricky 2015/05/25			
1	KNOB	POM	1	BLACK			APPD:				
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SCALE	SHEET	REV.	CUSTOMER DRAWING	
							4:1	1/1	A		