




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

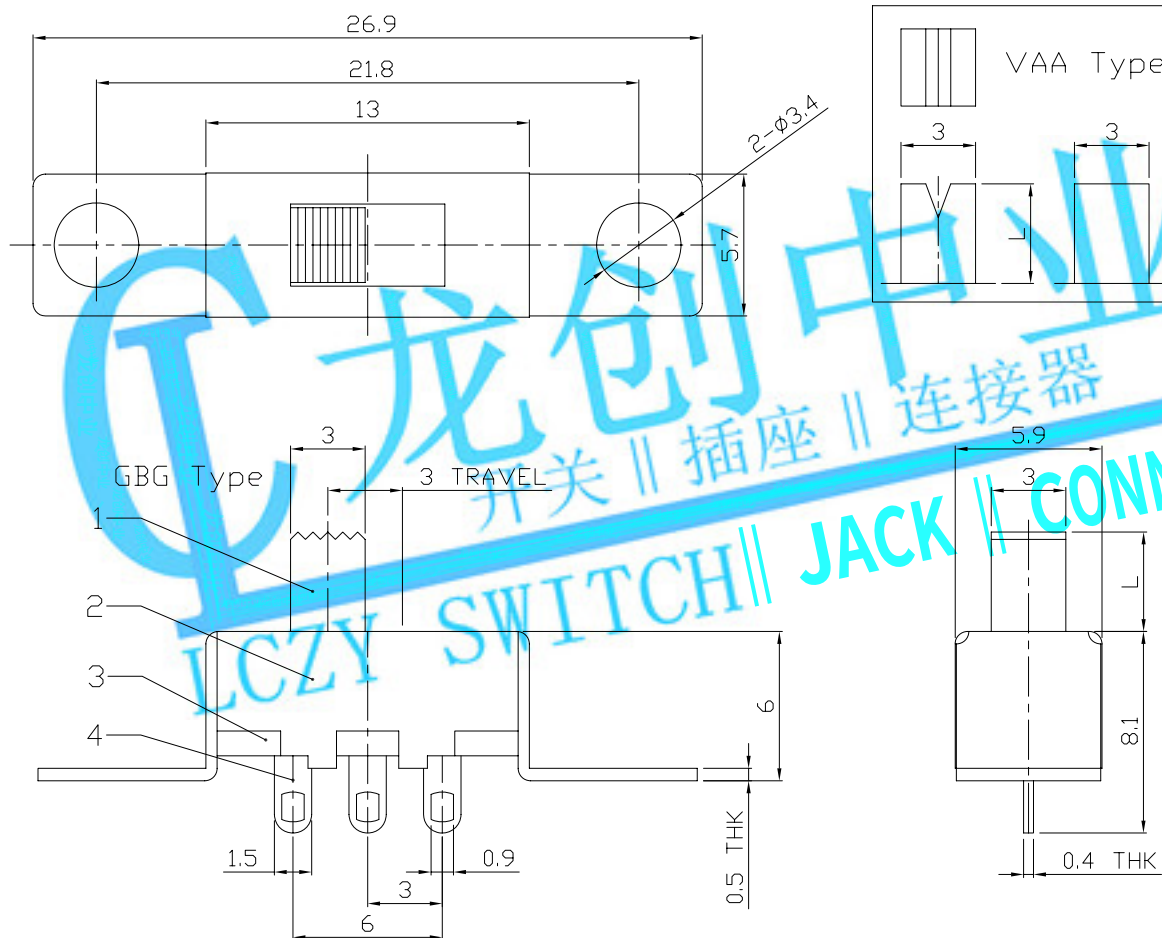

MODEL CODE

SS-12F48-GBG

Knob Type	L(mm)
GBG	~
VAA	~



PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L				
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12F48	
5	CONTACT	BRASS STRIP	1	Ag PLATED			DR: Ricky 2015/07/09		DWG NO.: ADL-12F48	
4	TERMINAL	BRASS STRIP	3	Ag PLATED			CHKD: Ricky 2015/07/09			
3	BASE	PHENOLIC RESIN	1	NATURAL			APPD:		SCALE	SHEET
2	FRAME	STEEL STRIP	1	Ni PLATED					3:1	1/1
1	KNOB	POM	1	BLACK					REV.	A
NO.	PARTS	MATERIAL	Q'TY	FINISHING					CUSTOMER DRAWING	