





RoHS
Compliant
2002/95/EC

MODEL CODE



SS-13D13-GDV

REV.	ECN.	NO.	APPD.

DIMENSIONS

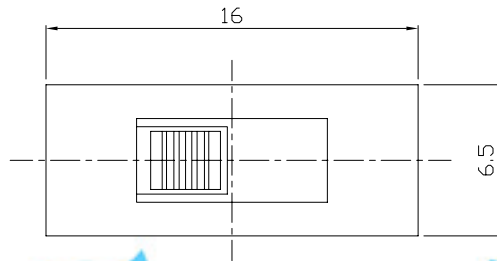

Knob Type	L(mm)
GDV	~
VAI	~

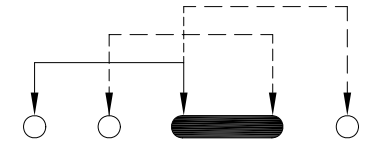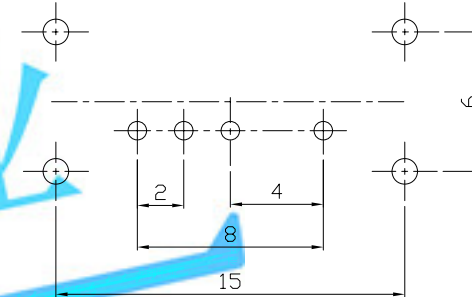



CIRCUIT DIAGRAM

P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	<T1→T2,T3→T2>200±100gf <T2→T3,T2→T1>250±100gf
OPERATING LIFE(cycles)	10,000

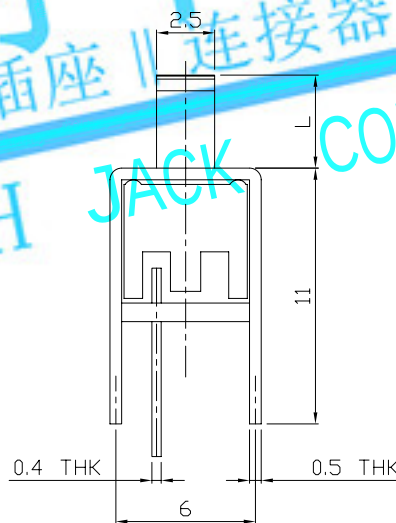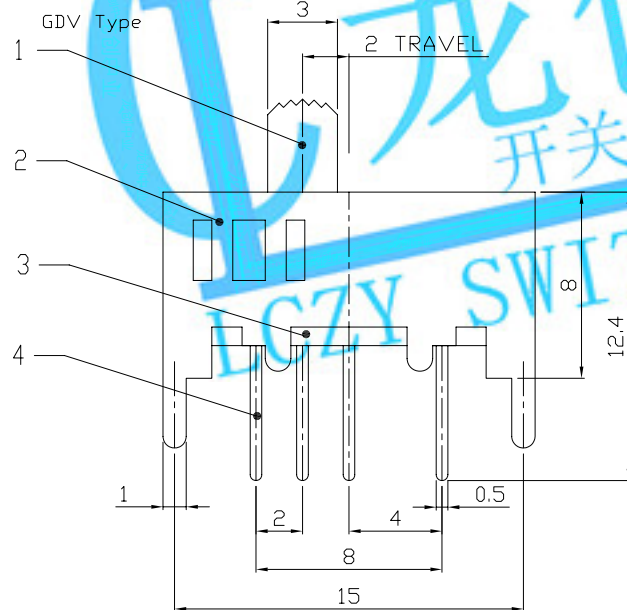

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED										
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L											
6	SPRING	STEEL WIRE	1	TEMPER		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL			PART NO.: SS-13D13							
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED													
4	TERMINAL	BRASS STRIP	4	Ag PLATED OVER Ni PLATED		FINISH	DR: <i>Ricky</i> 2015/06/10			DWG NO.: ADJ-13D13							
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE											
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY	CHKD: <i>Ricky</i> 2015/06/10										
1	KNOB	POM	1	BLACK						APPD:							
NO.	PARTS	MATERIAL	Q'TY	FINISHING			3:1						SHEET 1/1			REV. A	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.