



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.




MODEL CODE

SS-13F08-GFA

Knob Type
GFA
VAJ

L(mm)
~

DIMENSIONS

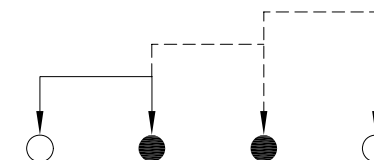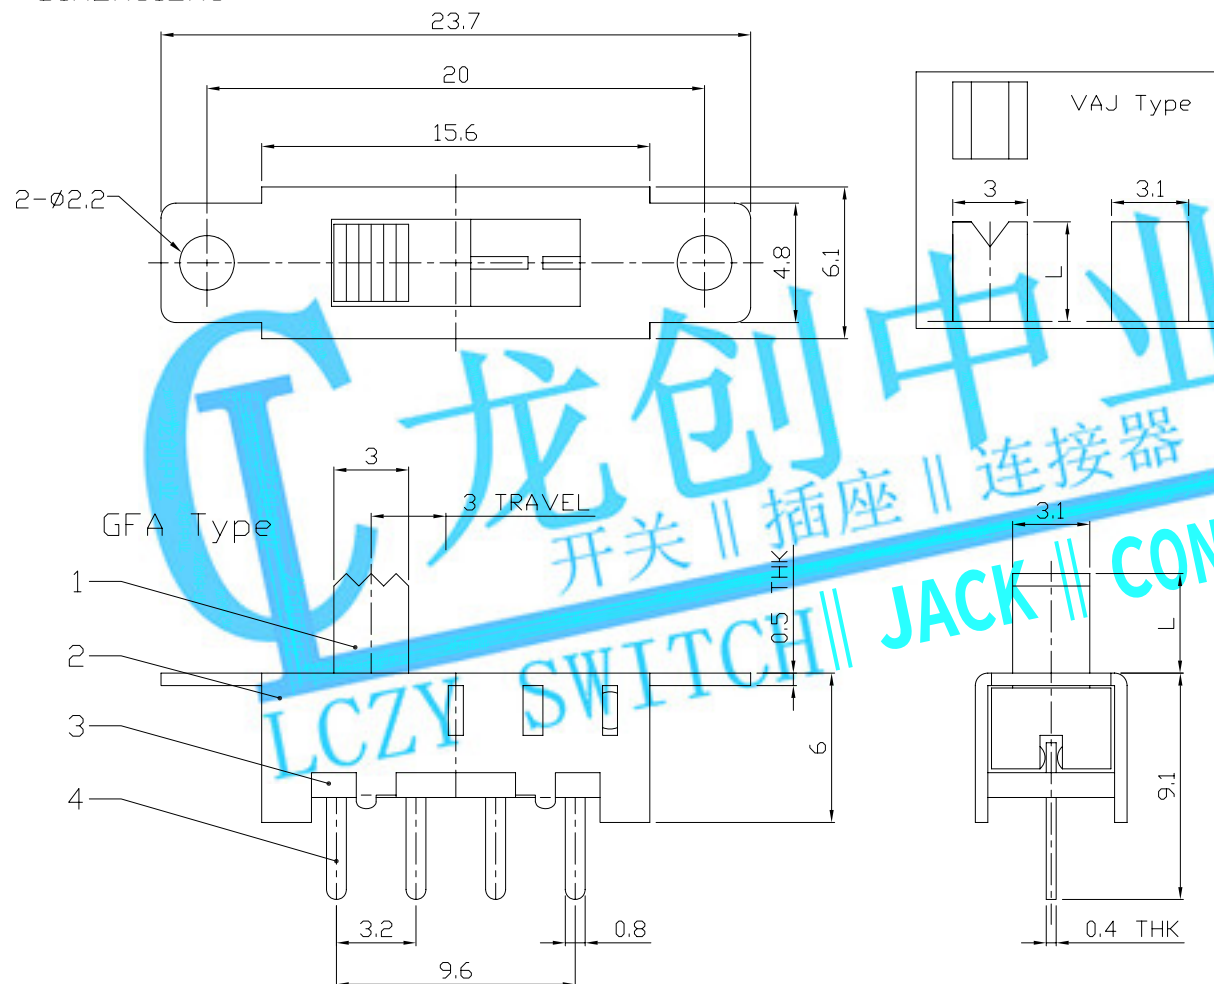

PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7	CONTACT CLIP	PBS STRIP	1	Ag PLATED	OVER 1.5mm: ±0.2mm	MAT'L						
6	STEEL BALL	STEEL	1	NATURAL		SEE NOTE	TITLE:		PART NO.:			
5	SPRING	STEEL WIRE	1	TEMPER			SLIDE SWITCH / VERTICAL		SS-13F08			
4	TERMINAL	BRASS STRIP	4	Ag PLATED		FINISH	DR: <i>Ricky</i> 2015/07/14		DWG NO.:			
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	CHKD: <i>Ricky</i> 2015/07/14		ADL-13F08			
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY						
1	KNOB	POM	1	BLACK					SCALE	SHEET	REV.	CUSTOMER DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:		3:1	1/1	A	