

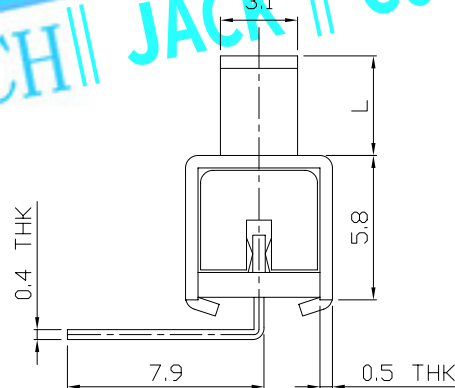
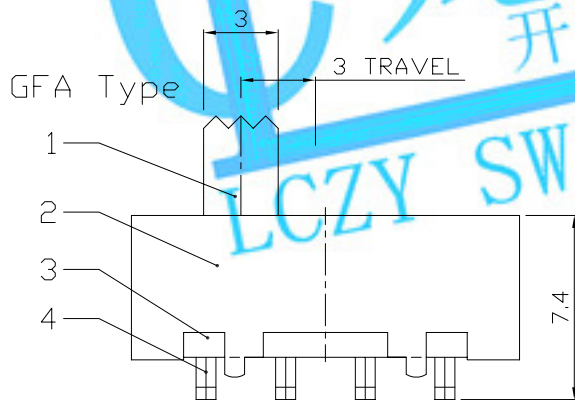




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

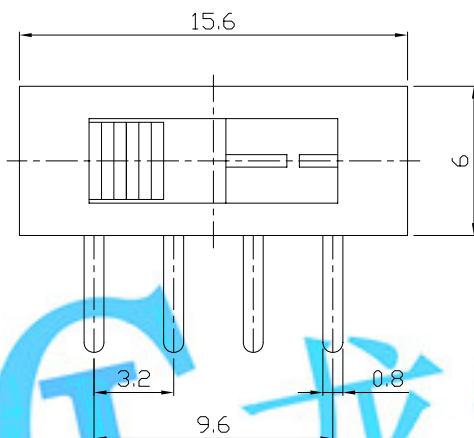


MODEL CODE

SS-13F16-GFA

Knob Type
GFA
VAJ

L(mm)
~

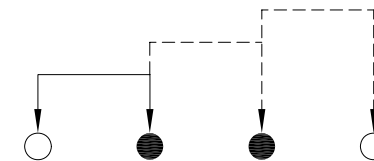

CIRCUIT DIAGRAM

PCB LAYOUT BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
7	STEEL BALL	STEEL	1	Ag PLATED	OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-13F16				
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD		FINISH	DR: <i>Ricky</i> 2015/07/14		DWG NO.: ADL-13F16				
4	TERMINAL	BRASS STRIP	4	Ag PLATED		SEE NOTE	CHKD: <i>Ricky</i> 2015/07/14		SCALE		SHEET	REV.	CUSTOMER DRAWING
3	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY	APPD:		3:1		1/1	A	
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.								
1	KNOB	POM	1	BLACK									
NO.	PARTS	MATERIAL	Q'TY	FINISHING									