





DIMENSIONS

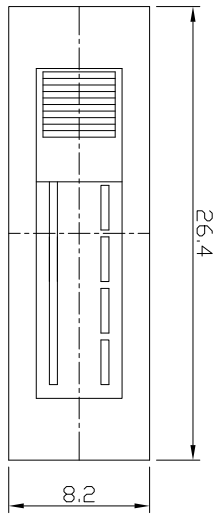


GBB Type

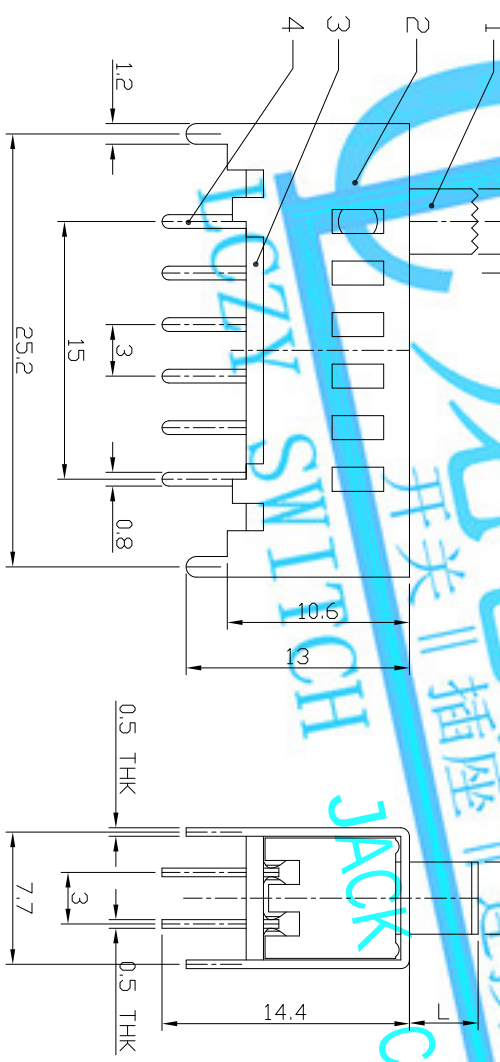

P.C.B LAYER
BOTTOM VIEW

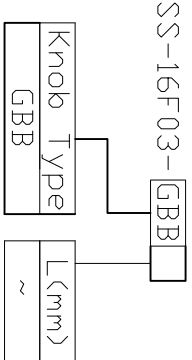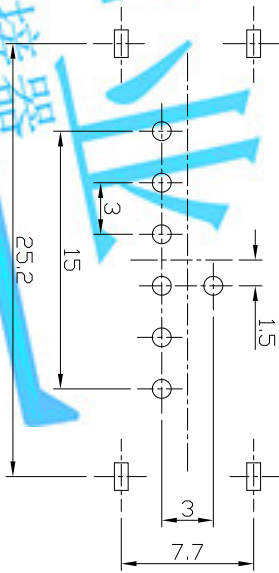

MODEL CODE

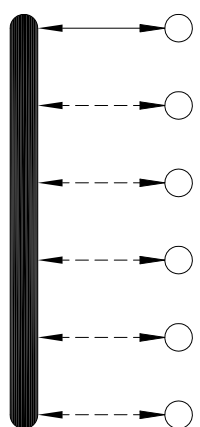

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P6T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	CONTACT CLIP	BRASS STEEL	1	Ag PLATED		MAT'L					
6	SPRING	STEEL WIRE	2	NATURAL	SEE NOTE						
5	STEEL BALL	STEEL	2	NATURAL							
4	TERMINAL	BRASS STRIP	7	Ag PLATED		FINISH		TITLE: SLIDE SWITCH / VERTICAL	PART NO: SS-16F 03		
3	BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE						
2	FRAME	STEEL STRIP	1	Zn PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY		DR: <i>Sticky</i> 2015/07/15	DWG NO: ADL-16F 03		
1	KNDB	POM	1	BLACK		APPD: <i>Sticky</i> 2015/07/15	CHKD: <i>Sticky</i> 2015/07/15	SCALE	SHEET	REV.	CUSTOMER DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING				2:1	1/1	A	