
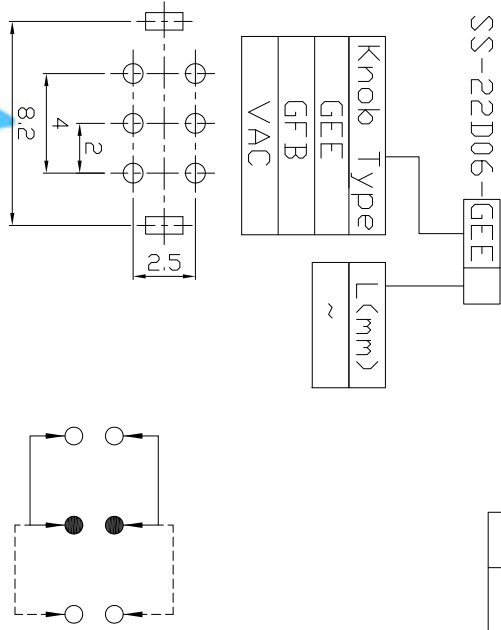
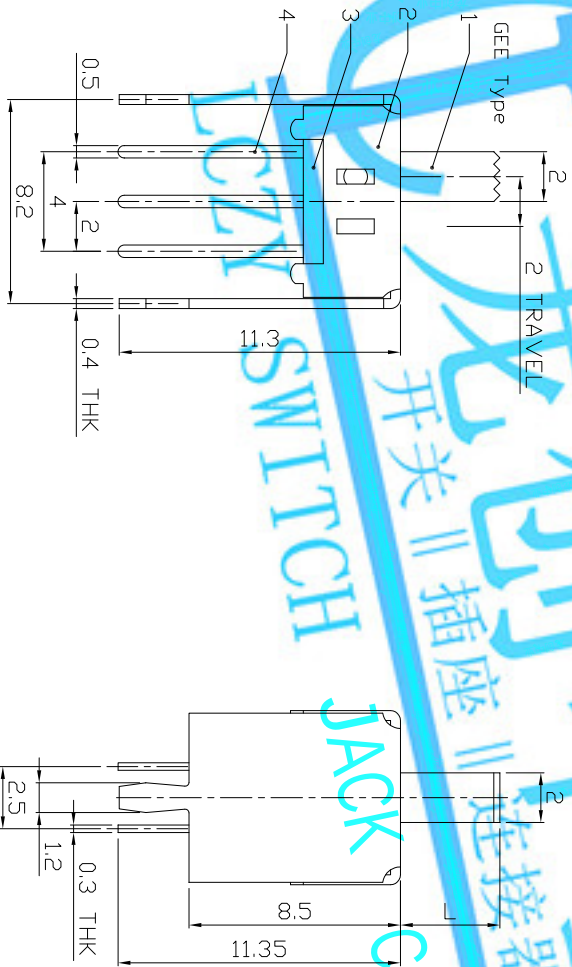
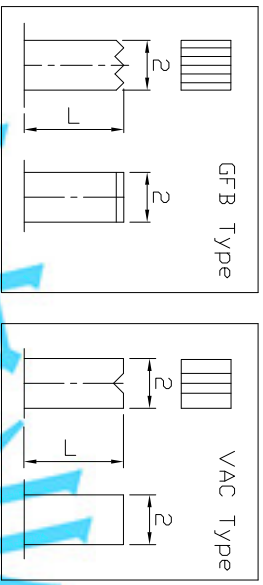


DIMENSIONS



MODEL CODE

SS-22D06-GEE

REV.	ECN.	NO.	APPD.

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING PLATE	SUS	1	NATURAL		SEE NOTE					
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED							
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH		TITLE: SLIDE SWITCH / VERTICAL PART NO.: SS-22D06			
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE					
2	FRAME	STEEL STRIP	1	NI PLATED		DR: Jiccky 2015/09/01	DWG NO: ADL-22D06				
1	KNDB	PDM	1	BLACK		CHKD: Jiccky 2015/09/01	SCALE SHEET REV. 4/1 1/1 A				
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:		CUSTOMER DRAWING			