
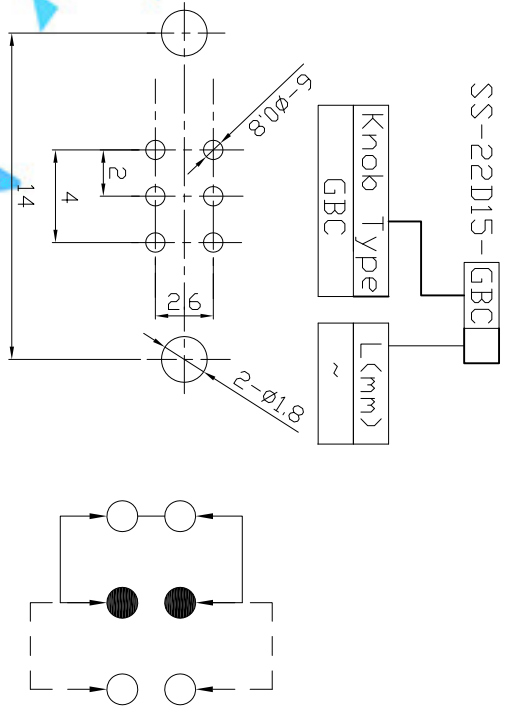
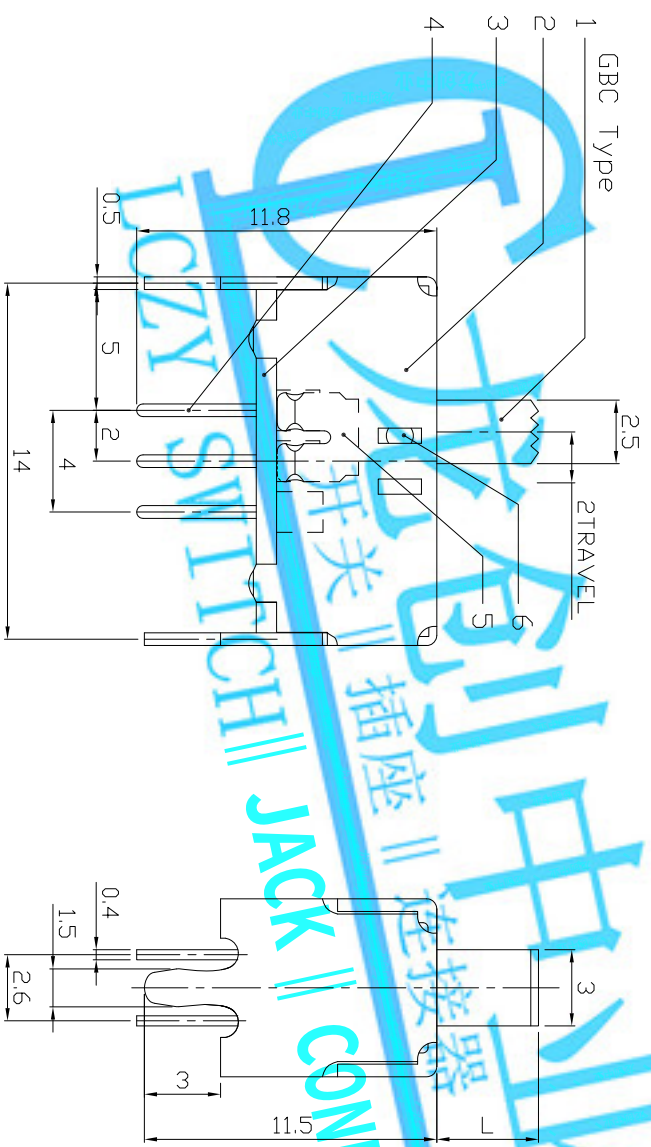


DIMENSIONS

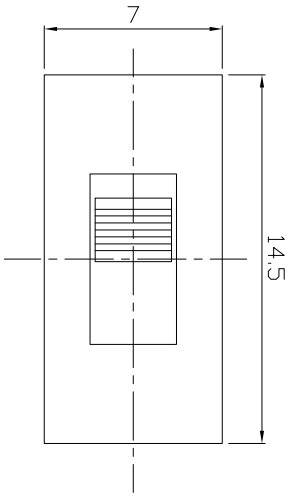

MODEL CODE

SS-22D15-GBC

Knob Type
GBC

L(mm)
~

ELECTRO-MECHANICAL CHARACTERISTICS

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

		UNITS		LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
		mm					
		WITHIN 1.5mm: ±0.1mm					
		OVER 1.5mm: ±0.2mm					
8							
7	SPRING	SUS STRIP	1	NATURAL			
6	STEEL BALL	STEEL	1	NATURAL			
5	CONTACT CLIP	PBS C5E210R-EH	1	Ag CLAD			
4	TERMINAL	BRASS STRIP	6	Ag PLATED			
3	BASE	PHENOLIC RESIN	1	NATURAL			
2	FRAME	STEEL STRIP	1	NI PLATED			
1	KNDB	PDM	1	BLACK			
ND.	PARTS	MATERIAL	Q'TY	FINISHING			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN CONSENT OF ACCURATE INNOTECH INC.

		MATERIAL					
		SEE NOTE					
		FINISH					
		SEE NOTE					
		Q'TY					
		APPD.					

		DWG NO.:					
		SCALE					
		SHEET					
		REV.					
		A					
		CUSTOMER DRAWING					