

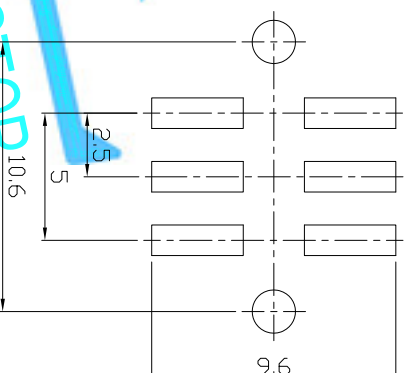



DIMENSIONS

MODEL CODE

SS-22E10-GFE

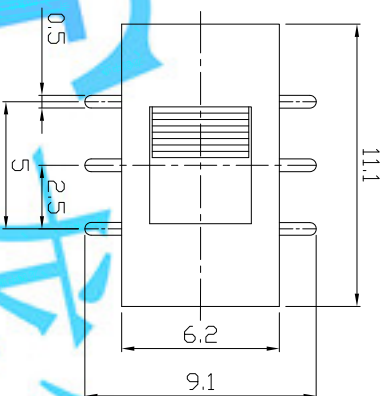


P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

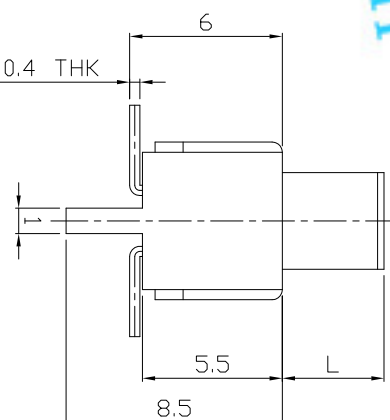

LONGCHUANG ZHONGYE (HK)CO.,LIMITED											
TITLE:						PART NO:					
SLIDE SWITCH / VERTICAL						SS-22E10					
DR: <i>Jacky</i> 2015/09/01						DWG NO: ADL-22E10					
CHKD: <i>Jacky</i> 2015/09/01											
APPD:						SCALE		SHEET		REV.	
						3:1		1/1		A	
						CUSTOMER DRAWING					
UNITS mm											
WITHIN 1.5mm: ±0.1mm						MAT'L					
OVER 1.5mm: ±0.2mm						SEE NOTE					
						FINISH					
						SEE NOTE					
						Q'TY					
											
						APPD:					
						SCALE		SHEET		REV.	
						3:1		1/1		A	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INVENTECH INC.											
Q'TY						FINISHING		MATERIAL		PARTS	
1						BLACK		PDM		1	
1						NI PLATED		STEEL STRIP		1	
1						NATURAL		PHEUDLIC RESIN		1	
								BRASS STRIP		2	
								BRASS STRIP		2	
								STEEL WIRE		2	
										7	
										8	