

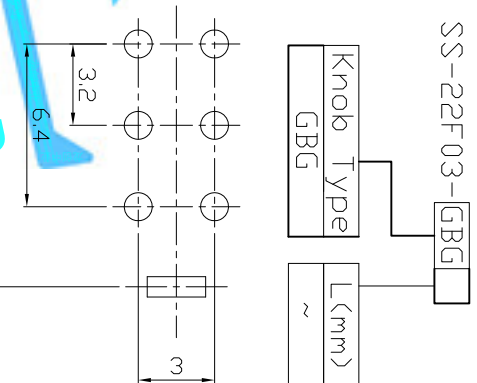
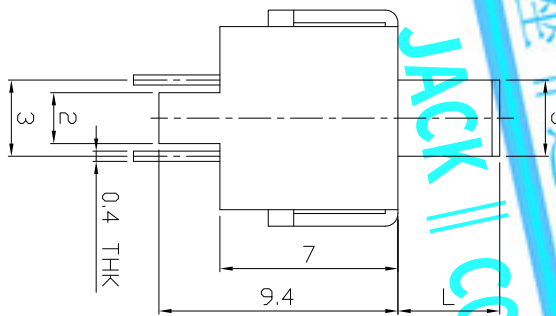


DIMENSIONS

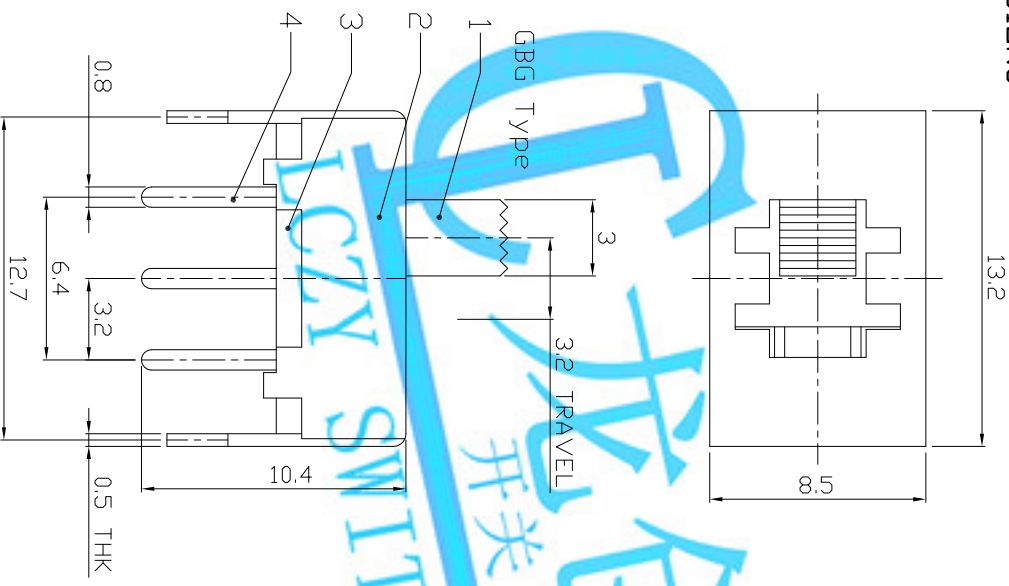

MODEL CODE

SS-22F03-GBG

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	mm				
6	CONTACT	BRASS	2	Ag PLATED		MAT'L				
5	SPRING	STEEL WIRE	2	NATURAL		SEE NOTE				
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH	TITLE: SLIDE SWITCH / VERTICAL			
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE				
2	FRAME	STEEL STRIP	1	NI PLATED		DR: Ricky 2015/09/01				
1	KNDB	PDM	1	BLACK		CHKD: Ricky 2015/09/01				
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:	DWG NO: ADL-22F03	SCALE	SHEET 1/1	REV. A
			Q'TY	FINISHING			1:3			CUSTOMER DRAWING