

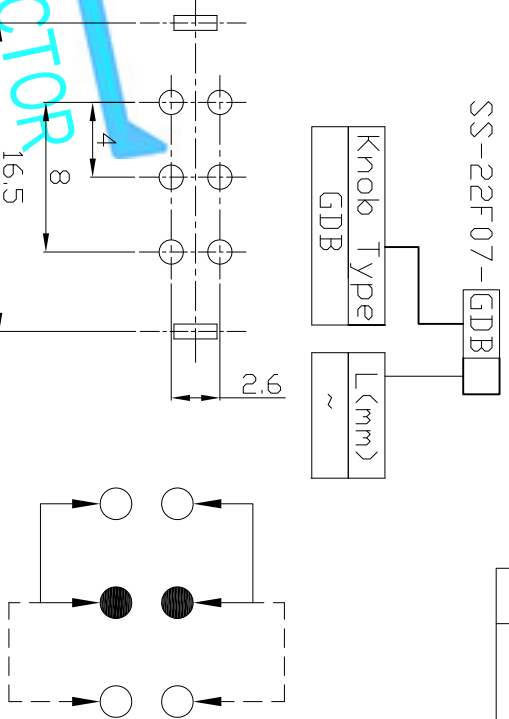


DIMENSIONS

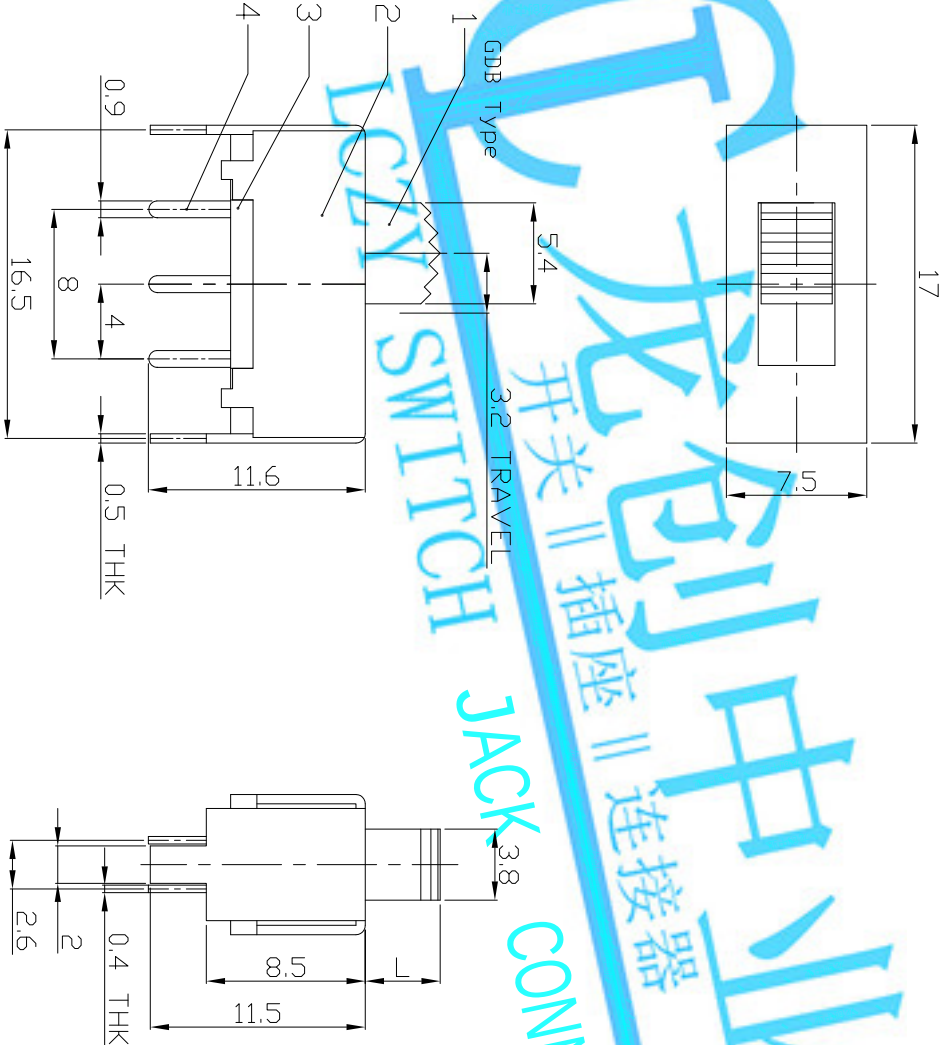

MODEL CODE

SS-22F07-GDB



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	SPRING	STEEL WIRE	2	NATURAL	FINISH	SEE NOTE				
5	CONTACT	BRASS STRIP	2	Ag PLATED	SEE NOTE	SLIDE SWITCH / VERTICAL				
4	TERMINAL	BRASS STRIP	6	Ag PLATED	DR:	Sticky	2015/05/26	DWG NO.:	ADL-22F07	CUSTOMER DRAWING
3	BASE	PHENOLIC RESIN	1	BLACK	CHKD:	Sticky	2015/05/26	SCALE	SHEET 1/1	REV. A
2	FRAME	STEEL STRIP	1	Ni PLATED	Q'TY	APPD:				
1	KNDB	POM	1	BLACK						
ND.	PARTS	MATERIAL	Q'TY	FINISHING						