

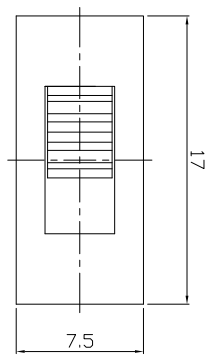


MODEL CODE

SS-22F20-GDB



DIMENSIONS

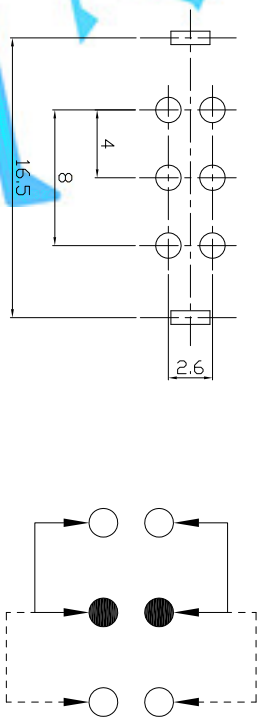


P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V AC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

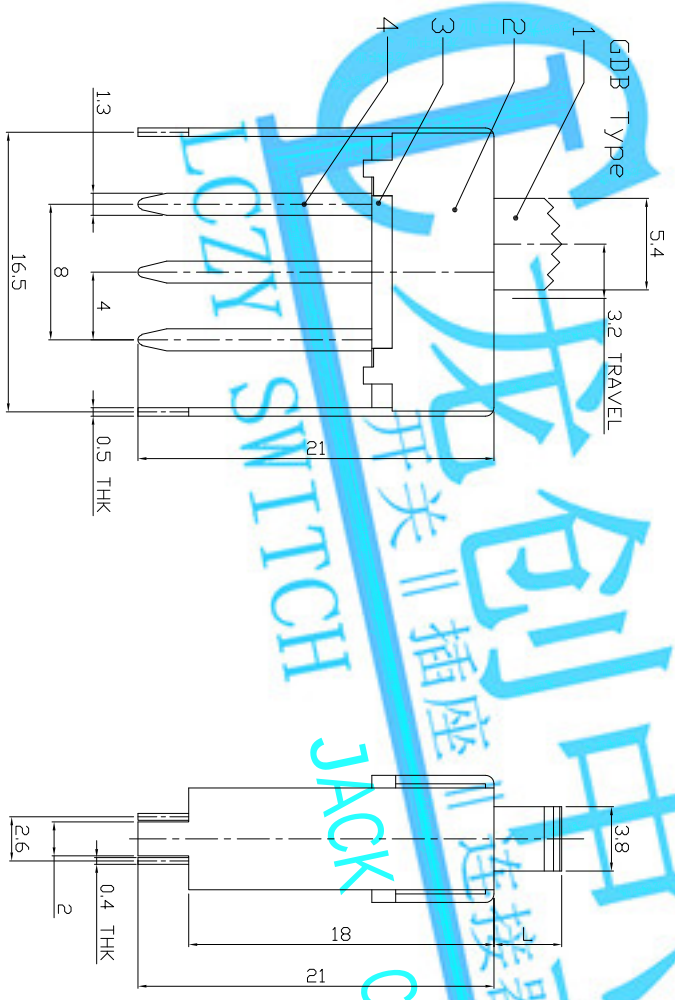

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING	STEEL WIRE	2	NATURAL	SEE NOTE					
5	CONTACT	BRASS	2	Ag PLATED						
4	TERMINAL	BRASS STRIP	6	Ag PLATED	FINISH		TITLE: SLIDE SWITCH / VERTICAL			
3	BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE					
2	FRAME	STEEL STRIP	1	Ni PLATED	DR: <i>Rocky</i> 2015/09/02	DWG NO: ADL-22F20				
1	KNDB	PDM	1	BLACK	CHKD: <i>Rocky</i> 2015/09/02	SCALE SHEET REV. 1/1				
ND.	PARTS	MATERIAL	Q'TY	FINISHING	APPD:		CUSTOMER DRAWING			
		1	2	3	4	5	6	7		