





RoHS
Compliant
2002/95/EC

MODEL CODE



SS-22H01-GBF

REV.	ECN.	NO.	APPD.



DIMENSIONS

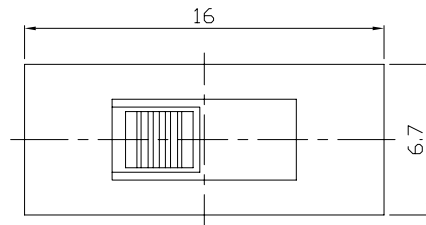

Knob Type	L(mm)
GBF	~
VAI	~

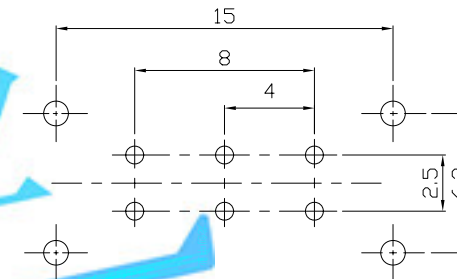

CIRCUIT DIAGRAM

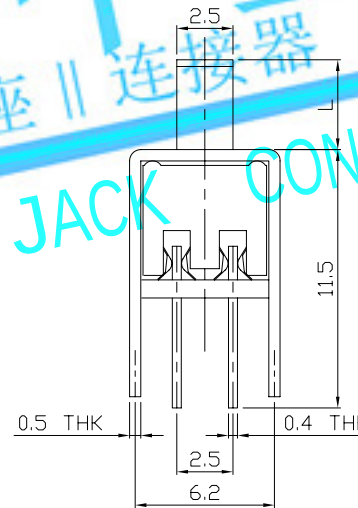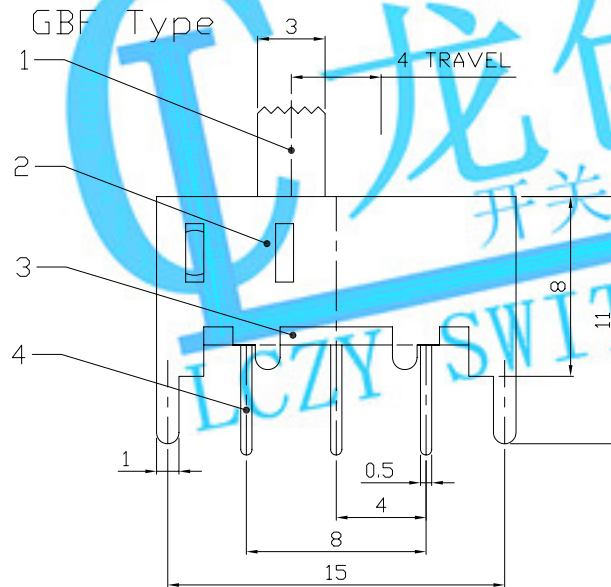

P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L						
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-22H01			
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH	DR: <i>Ricky</i> 2015/09/02		DWG NO.: ADL-22H01			
4	TERMINAL	BRASS STRIP	6	Ag PLATED		SEE NOTE	CHKD: <i>Ricky</i> 2015/09/02					
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
2	FRAME	STEEL STRIP	1	Ni PLATED					3:1	1/1	A	
1	KNOB	POM	1	BLACK								
NO.	PARTS	MATERIAL	Q'TY	FINISHING								

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.