



RoHS
Compliant
2002/95/EC





MODEL CODE

SS-22H02-GBF

Knob Type
GBF
VAI



L(mm)
~

DIMENSIONS

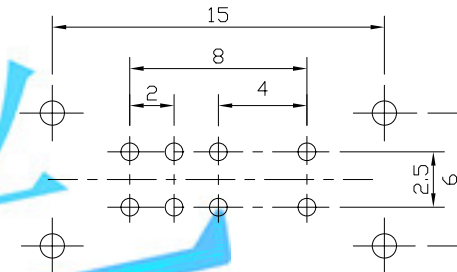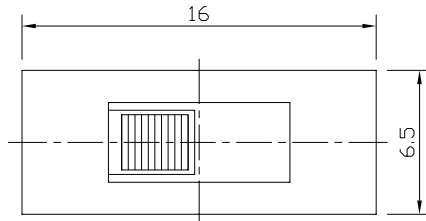

P.C.B. LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

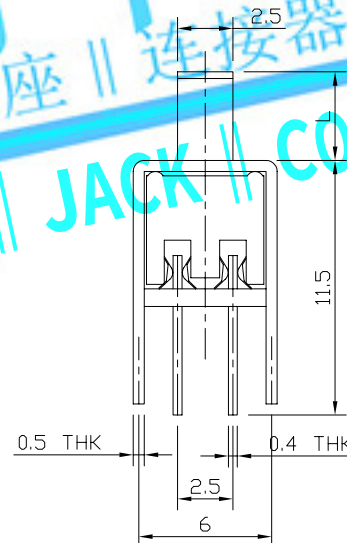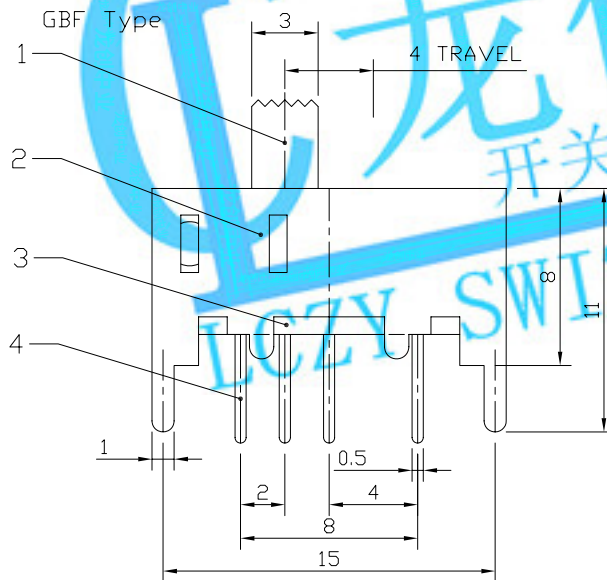

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NO SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-22H02				
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			FINISH SEE NOTE	DR: <i>Ricky</i> 2015/05/27		DWG NO.: ADL-22H02			
4	TERMINAL	BRASS STRIP	8	Ag PLATED				CHKD: <i>Ricky</i> 2015/05/27					
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY		APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
2	FRAME	STEEL STRIP	1	Ni PLATED						3:1	1/1	A	
1	KNOB	POM	1	BLACK									
NO.	PARTS	MATERIAL	Q'TY	FINISHING									