

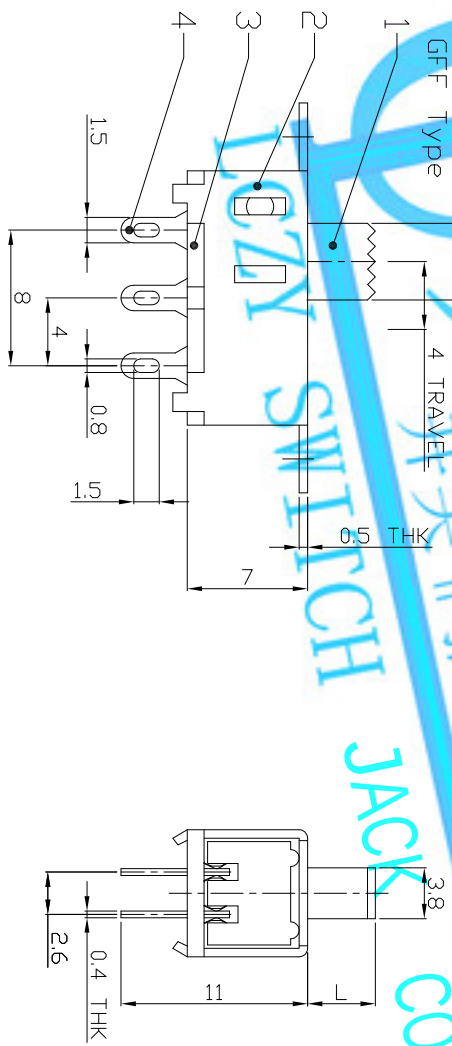
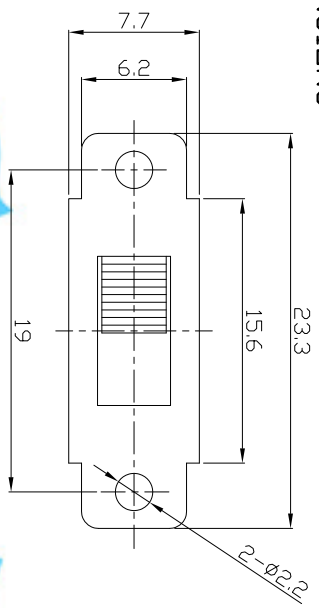


DIMENSIONS

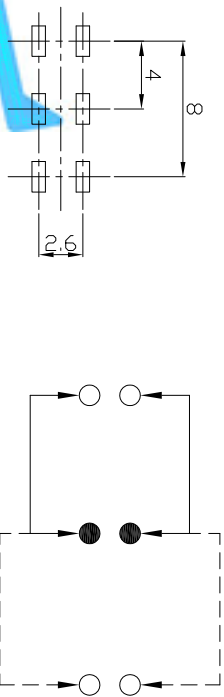

MODEL CODE

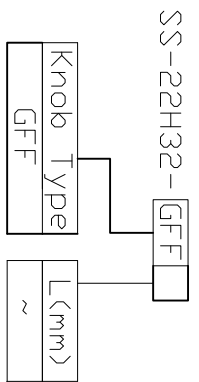

PCB LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	CONTACT CLIP	PBS STRIP	2	AG PLATED		FINISH	SEE NOTE				
5	TERMINAL	BRASS STRIP	6	AG PLATED		SEE NOTE					
4	BASE	PHENOLIC RESIN	1	NATURAL		DR:	2015/09/03				
3	FRAME	STEEL STRIP	1	BLACK		CHKD:	2015/09/03	DWG NO.:	ADL-22H32	SCALE	SHEET
2	KNDB	POM	1	BLACK		Q'TY		REV.		1/1	A
1	PARTS	MATERIAL	Q'TY	FINISHING		APPD:		CUSTOMER	DRAWING		