


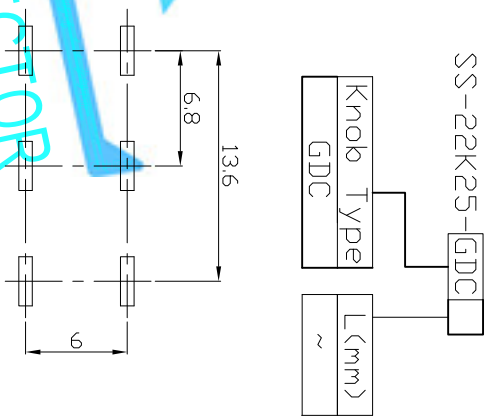
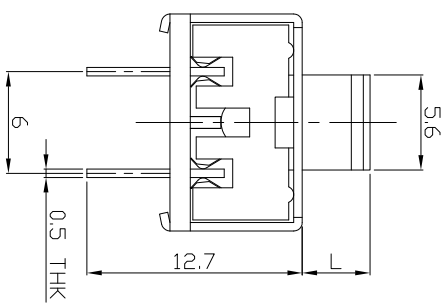


DIMENSIONS

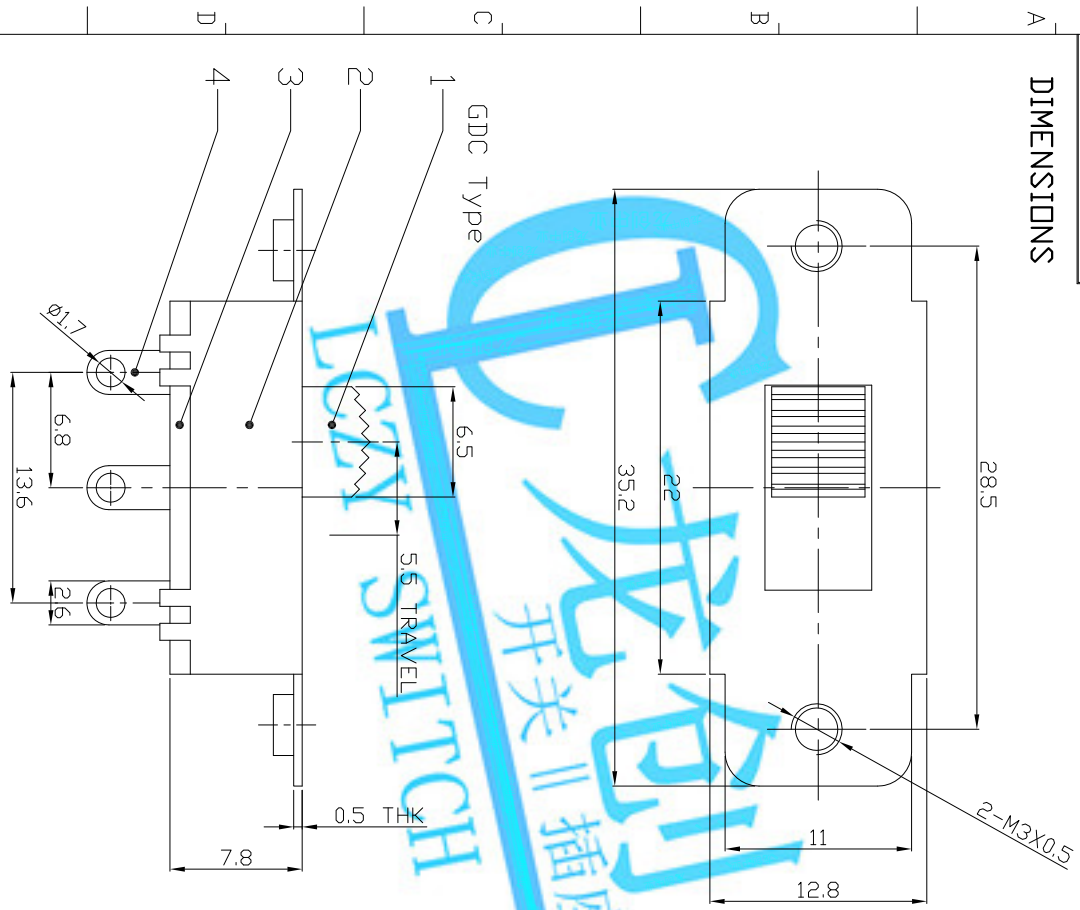

MODEL CODE

SS-22K25-GDC



P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	5.5mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8	CONTACT CLIP	PBS STRIP	2	Ag PLATED	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	POSITION PLATE	STEEL STRIP	1	Ni PLATED	SEE NOTE	MAT'L				
6	STEEL BALL	STEEL	1	NATURAL	SEE NOTE	FINISH				
5	SPRING	STEEL WIRE	1	NATURAL	SEE NOTE	DR: 2015/09/04				
4	TERMINAL	BRASS STRIP	6	Ag PLATED	SEE NOTE	CHKD: 2015/09/04	PART NO.: SS-22K25			
3	BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE	APPD: 2015/09/04				
2	FRAME	STEEL STRIP	1	Ni PLATED	SEE NOTE	SCALE 1/1				
1	KNDB	POM	1	BLACK	SEE NOTE	REV. A				
NO.	PARTS	MATERIAL	Q'TY	FINISHING	SEE NOTE	CUSTOMER DRAWING				