

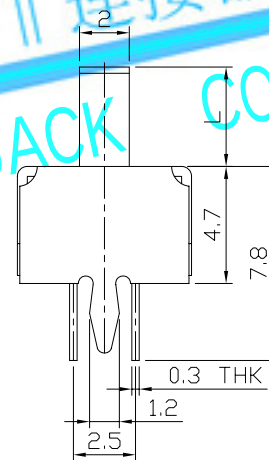
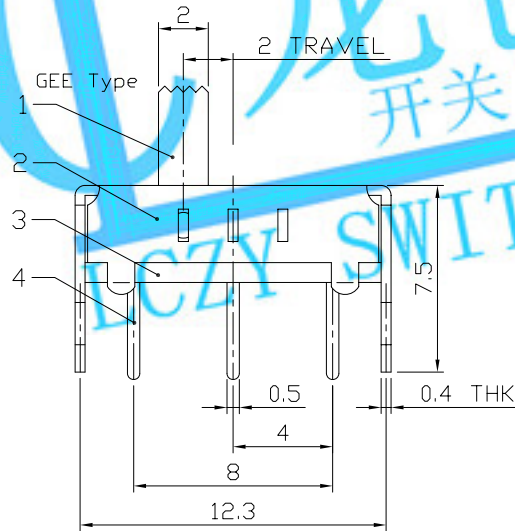




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

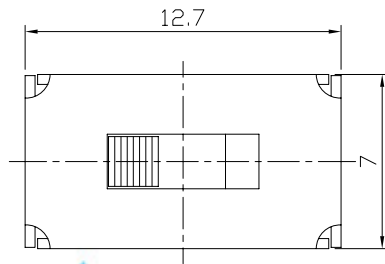


MODEL CODE


SS-23D16-GEE

Knob Type
GEE
VAC

L(mm)
~

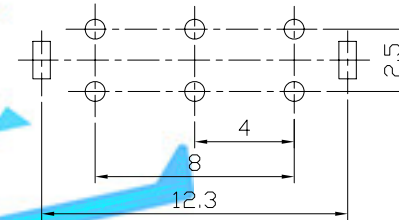

PCB LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L				
6	SPRING PLATED	PBS STRIP	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-23D16	
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		SEE NOTE				
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH	DR: Ricky 2015/05/28		DWG NO.: ADL-23D16	
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE				
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY	CHKD: Ricky 2015/05/28		SCALE	
1	KNOB	POM	1	BLACK						
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		APPD:		SHEET	
							7/2		1/1	
							A		CUSTOMER	
							DRAWING			