


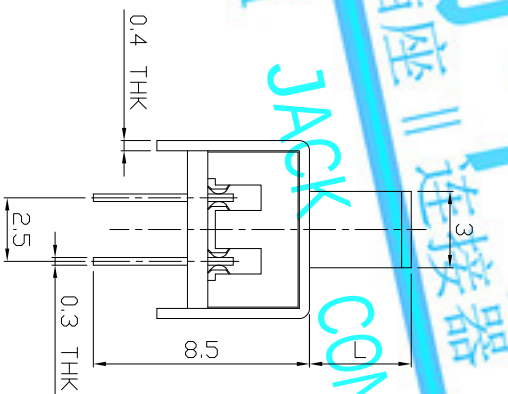
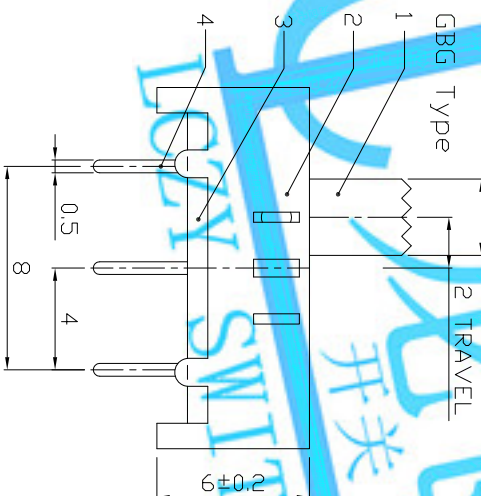


DIMENSIONS

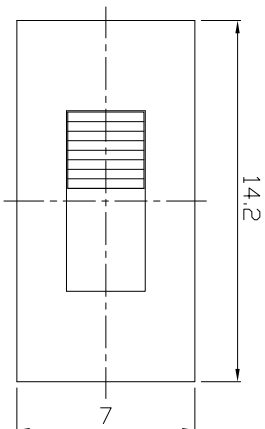

MODEL CODE

SS-23D25-GBG

Knob Type

636

 $\angle m m \angle$

P.C.B LAYOUT

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE: SLIDE SWITCH / VERTICAL				PART NO.: SS-23D25					
				DWG NO.: ADL-23D25					
DR: <i>Rocky</i> 2015/09/07									
CHKD: <i>Rocky</i> 2015/09/07									
APPD:				SCALE: SHEET: REV. CUSTOMER DRAWING					
				4/1 1/1 A					
UNIT: mm									
WITHIN 1.5mm: ±0.1mm									
OVER 1.5mm: ±0.2mm									
SEE NOTE									
FINISH									
SEE NOTE									
QTY									
									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK) CO., LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK) CO., LIMITED									
8									
7									
6	SPRING WIRE	PBS STRIP	2	NATURAL					
5	CONTACT CLIP	PBS STRIP	2	AG PLATED					
4	TERMINAL	BRASS STRIP	6	AG PLATED					
3	BASE	PHENOLIC RESIN	1	NATURAL					
2	FRAME	STEEL STRIP	1	NI PLATED					
1	KNOB	POM	1	BLACK					
NO.	PARTS	MATERIAL	QTY	FINISHING					

LONGCHUANG ZHONGYE (HK) CO., LIMITED