





RoHS
Compliant
2002/95/EC

MODEL CODE

SS-23D26-GEE



REV.	ECN.	NO.	APPD.

DIMENSIONS

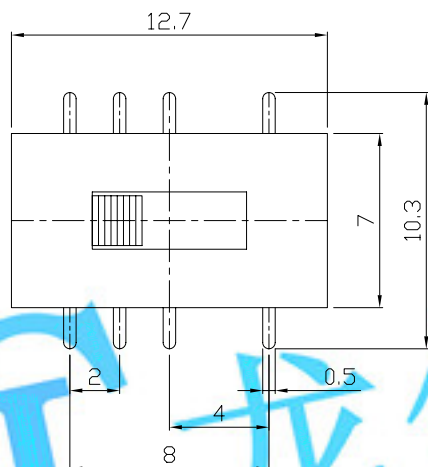



Knob Type
GEE
VAC

L(mm)
~

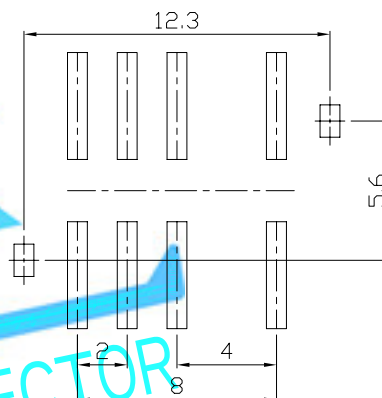

CIRCUIT DIAGRAM

P.C.B LAYOUT
BOTTOM VIEW

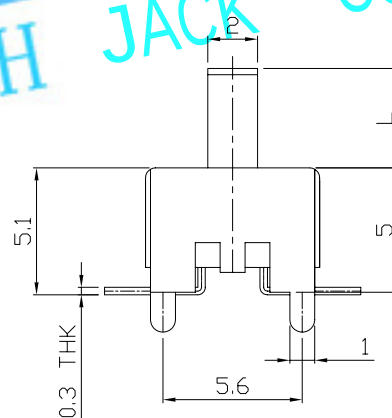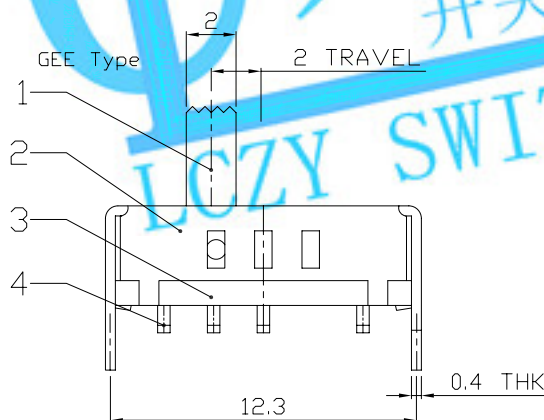

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING PLATE	PBS STRIP	1	NATURAL		SEE NOTE		TITLE:		PART NO.:	
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED				SLIDE SWITCH / VERTICAL		SS-23D26	
4	TERMINAL	BRASS STRIP	8	Ag PLATED				DR: Ricky 2015/09/07		DWG NO.:	
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH		CHKD: Ricky 2015/09/07		ADL-23D26	
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY		APPD:		SCALE	SHEET
1	KNOB	POM	1	WHITE/BLACK						3:1	1/1
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					REV.	CUSTOMER
										A	DRAWING