



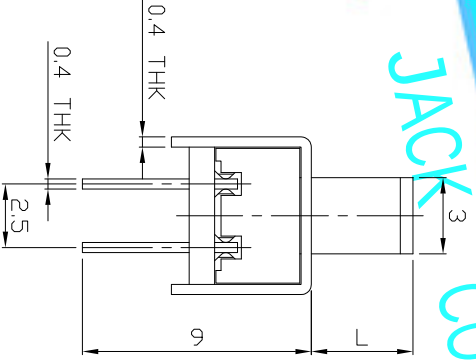
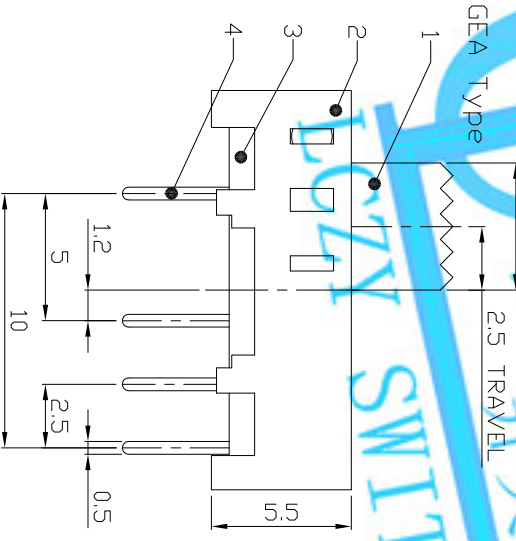


DIMENSIONS

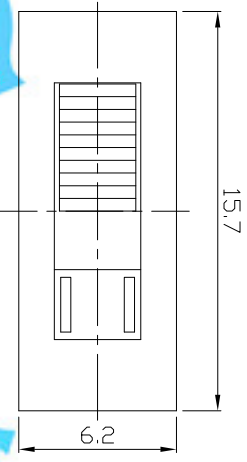

MODEL CODE

SS-23E06-GEA



PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL		MAT'L				
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		SEE NOTE				
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH				
4	TERMINAL	BRASS STRIP	8	Ag PLATED		SEE NOTE				
3	BASE	PHENOLIC RESIN	1	NATURAL		DR: Ricky 2015/09/08	SLIDE SWITCH / VERTICAL	PART NO.:	SS-23E06	DWG NO.:
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD: Ricky 2015/09/08				ADL-23E06
1	KNDB	PDM	1	BLACK		Q'TY		SCALE	SHEET	REV.
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:		4/1	1/1	A
			1							CUSTOMER DRAWING