

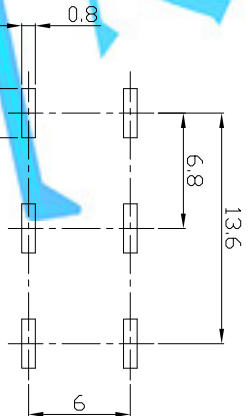
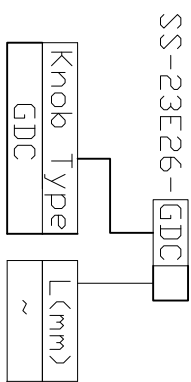
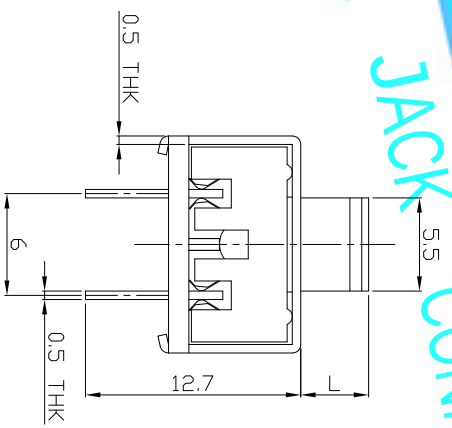


DIMENSIONS

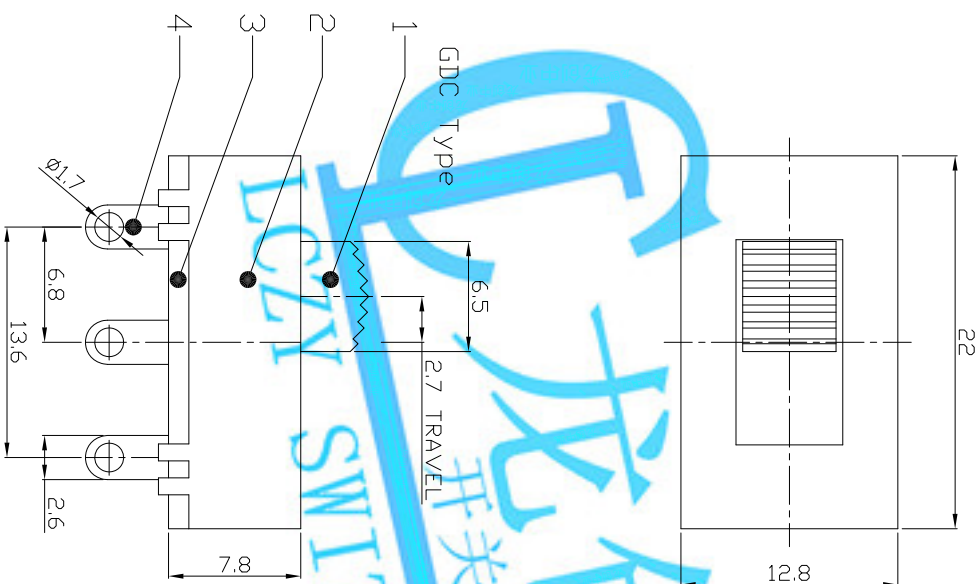

FOR LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	15A 250V AC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.7mm
OPERATING FORCE	350±100gf
OPERATING LIFE(cycles)	10,000

8	CONTACT CLIP	PBS STRIP	2	Ag PLATED	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7	POSITION PLATE	STEEL STRIP	1	Ni PLATED		MAT'L						
6	STEEL BALL	STEEL	1	NATURAL	SEE NOTE							
5	SPRING	STEEL WIRE	1	NATURAL	SEE NOTE							
4	TERMINAL	BRASS STRIP	6	Ag PLATED	FINISH							
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	DR: <i>Ricky</i> 2015/09/08	DWG NO:	ADL-23EE26			
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY	CHKD: <i>Ricky</i> 2015/09/08			SCALE SHEET	REV.	
1	KNDB	PDM	1	BLACK			APPD:		2/1	1/1	A	CUSTOMER DRAWING
ND.	PARTS	MATERIAL	Q'TY	FINISHING								