


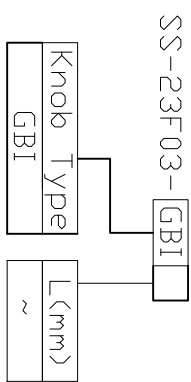


DIMENSIONS




PCB LAYOUT

BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

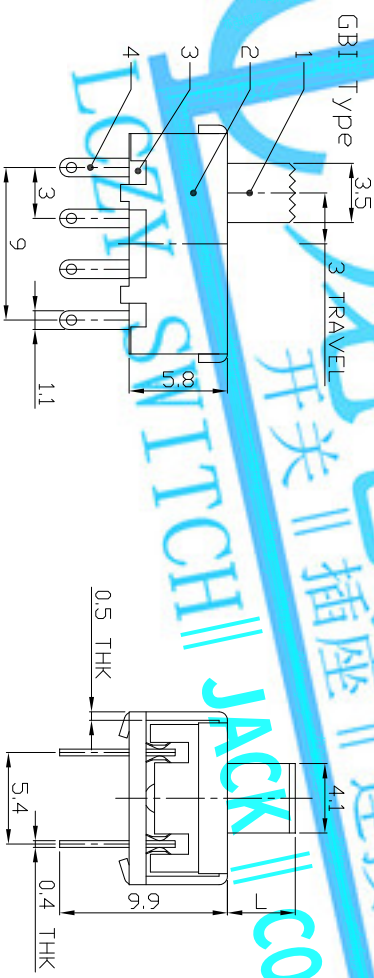

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH	SEE NOTE				
5	TERMINAL	BRASS STRIP	8	Ag PLATED		SEE NOTE					
4	BASE	PHENOLIC RESIN	1	NATURAL		DR:	Rocky 2015/10/07	PART NO.:		SS-23F03	
3	FRAME	STEEL STRIP	1	NI PLATED		CHKD:	Rocky 2015/10/07	DWG NO.:		ADL-23F03	
2	KNDB	PDM	1	BLACK		Q'TY		SCALE		SHEET 1/1	
1	PARTS	MATERIAL	Q'TY	FINISHING		APPD:		REV.		A	
								CUSTOMER		DRAWING	