

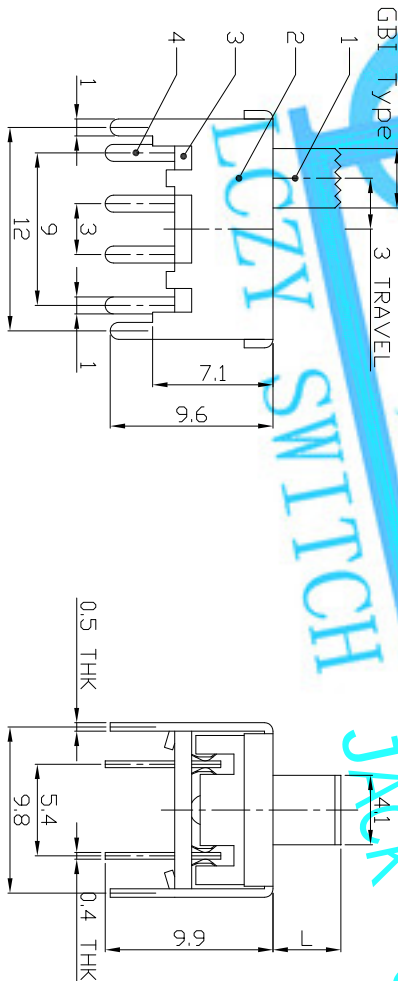




DIMENSIONS



MODEL CODE

SS-23F06-GBI



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L					
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		SEE NOTE					
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH					
4	TERMINAL	BRASS STRIP	8	Ag PLATED		SEE NOTE					
3	BASE	PHENOLIC RESIN	1	NATURAL		DR:	Rocky 2015/10/07	PART NO.:	SS-23F06	DWG NO.:	ADL-23F06
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD:	Rocky 2015/10/07	SCALE	SHEET	REV.	CUSTOMER
1	KNDB	PDM	1	BLACK		Q'TY		3/1	1/1	A	DRAWING
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:					