


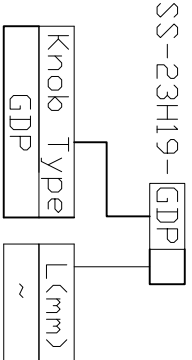
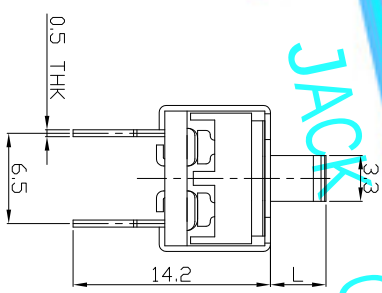


DIMENSIONS

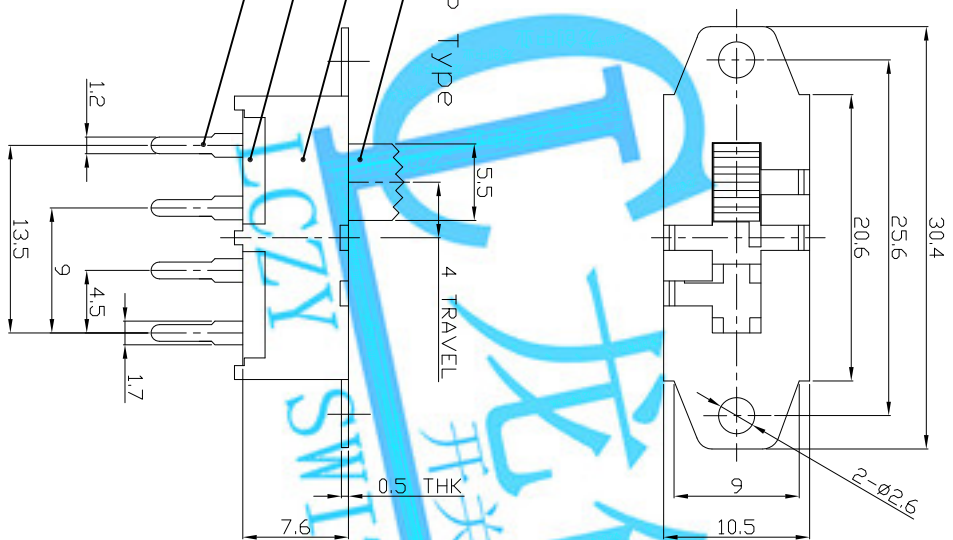

MODEL CODE

SS-23H19-GDP

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	3A 250V AC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7						MAT'L	TITLE:			
6	SPRING PLATE	PBS STRIP	3	NATURAL		SEE NOTE	SLIDE SWITCH / VERTICAL			
5	CONTACT	PBS STRIP	2	Ag PLATED		FINISH	PART NO.:			
4	TERMINAL	BRASS STRIP	8	Ag PLATED		SEE NOTE	SS-23H19			
3	BASE	PHENOLIC RESIN	1	BLACK		DR:	2015/10/08	DWG NO.:	ADL-23H19	
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD:	2015/10/08	SCALE	SHEET	REV.
1	KNDB	PDM	1	BLACK		Q'TY		2/1	1/1	A
ND	PARTS	MATERIAL	Q'TY	FINISHING		APPD:		CUSTOMER DRAWING		