

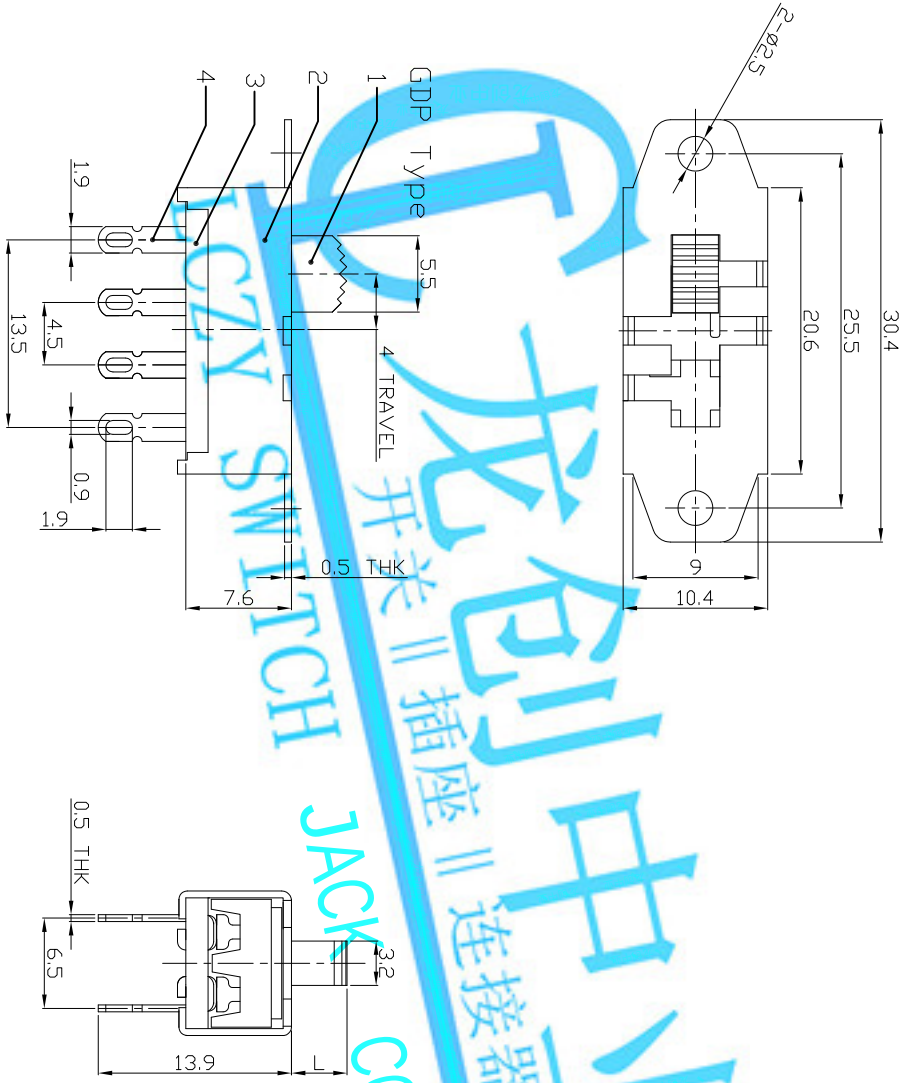



DIMENSIONS



MODEL CODE

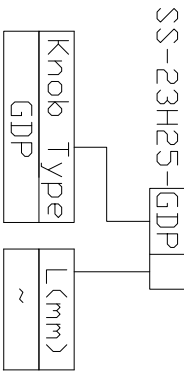

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	3A 125V AC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	350±150gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					MAT'L	SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL			
6	SPRING PLATE	PBS STRIP	3	NATURAL			PART NO.: SS-23H25			
5	CONTACT	COPPER STRIP	2	AG PLATED		FINISH	DWG NO.: ADL-23H25			
4	TERMINAL	COPPER STRIP	8	AG PLATED		SEE NOTE	SCALE SHEET REV. 1/1 A CUSTOMER DRAWING			
3	BASE	PHENOLIC RESIN	1	BLACK		DR: Ricky 2015/10/08				
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD: Ricky 2015/10/08				
1	KNDB	PDM	1	BLACK		Q'TY				
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:				