

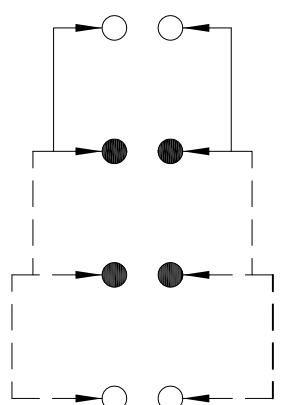
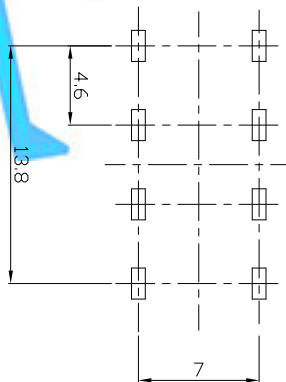
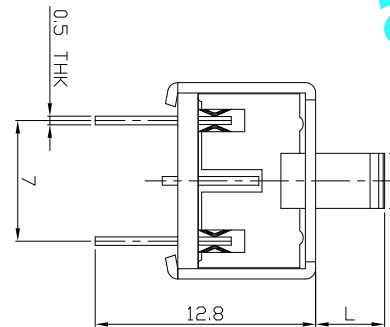


DIMENSIONS

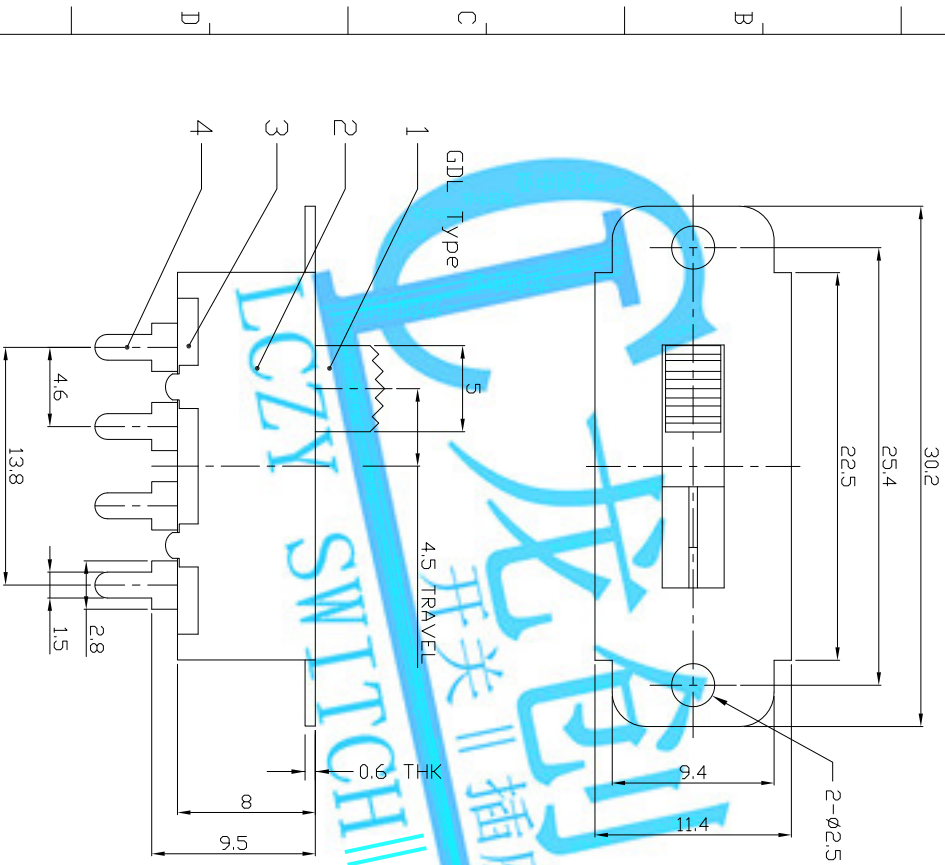

MODEL CODE

SS-23101-GDL



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	1.5A 125V AC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	4.5mm
OPERATING FORCE	450±150gf
OPERATING LIFE(cycles)	10,000

8	STRING PLATE	STEEL STRIP	1	Ni PLATED	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH	SEE NOTE	DR: 2015/05/29
5	STEEL BALL	STEEL	1	NATURAL		Q'TY	1	CHKD: 2015/05/29
4	TERMINAL	BRASS STRIP	8	Ag PLATED		Q'TY	1	APPD: 2015/05/29
3	BASE	PHENOLIC RESIN	1	BLACK		Q'TY	1	DWG NO: ADL-23101
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY	1	SCALE SHEET
1	KNDB	PDM	1	BLACK		Q'TY	1	REV.
ND.	PARTS	MATERIAL	Q'TY	FINISHING		Q'TY	1	CUSTOMER DRAWING