


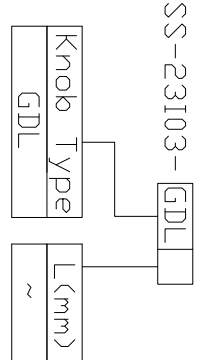
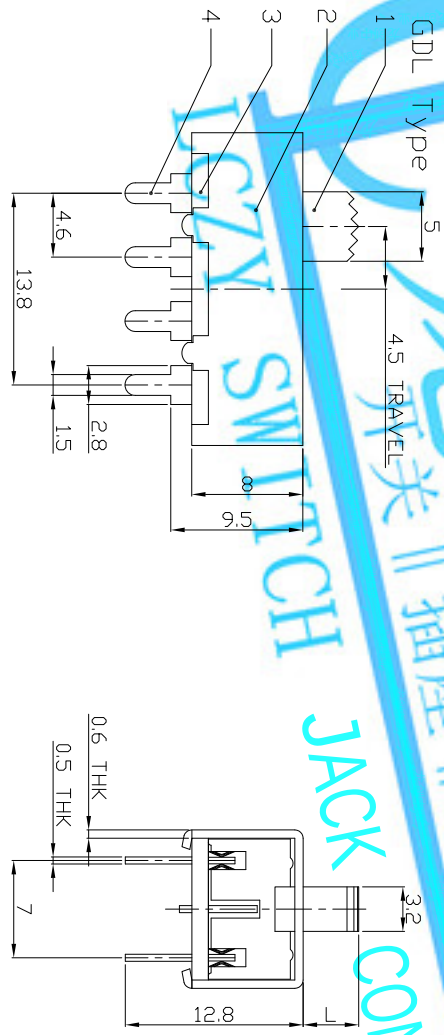


DIMENSIONS

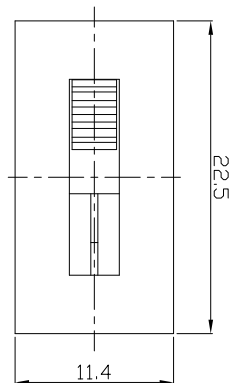

P.C.B LAYOUT

BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	1.5A 125V AC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	4.5mm
OPERATING FORCE	450±100gf
OPERATING LIFE(cycles)	10,000

8	SPRING PLATE	STEEL STRIP	1	Ni PLATED	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL STRIP	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED			SEE NOTE				
5	STEEL BALL	STEEL	1	NATURAL			FINISH				
4	TERMINAL	BRASS STRIP	8	Ag PLATED			SEE NOTE	TITLE:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-23103
3	BASE	PHENOLIC RESIN	1	BLACK				DR:	Rocky 2015/10/13	DWG NO.:	ADL-23103
2	FRAME	STEEL STRIP	1	Ni PLATED				CHKD:	Rocky 2015/10/13	SCALE	SHEET 1/1
1	KNDB	POM	1	BLACK				Q'TY		REV.	A
ND.	PARTS	MATERIAL	Q'TY	FINISHING				APPD:		CUSTOMER	DRAWING