


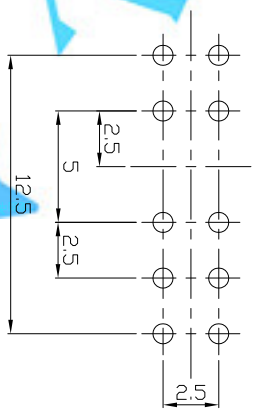


DIMENSIONS

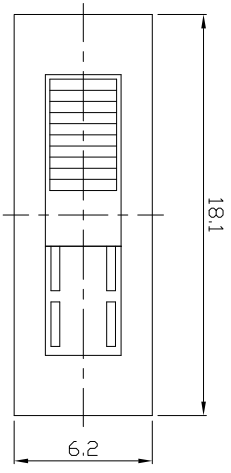


MODEL CODE

SS-24E01-GEA



P.C.B. LAYOUT
BOTTOM VIEW

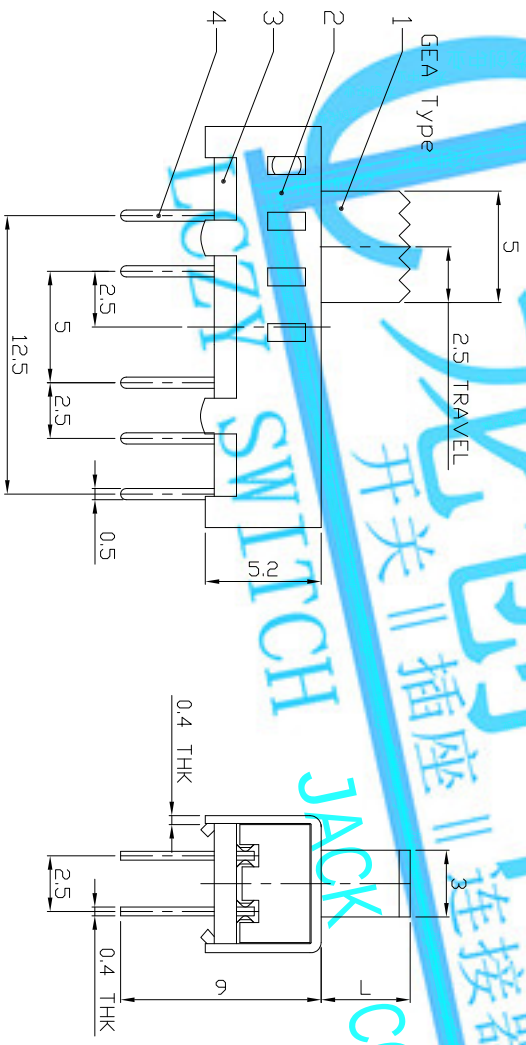

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	STEEL WIRE	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L					
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		SEE NOTE					
5	TERMINAL	BRASS STRIP	10	Ag PLATED		FINISH					
4	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE		TITLE:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-24E01
3	FRAME	STEEL STRIP	1	NI PLATED		DR:	Rocky 2015/05/29	DWG NO.:	ADL-24E01		
2	KNDB	PDM	1	BLACK		CHKD:	Rocky 2015/05/29	SCALE	SHEET	REV.	
1	PARTS	MATERIAL	Q'TY	FINISHING		APPD:		3/1	1/1	A	CUSTOMER DRAWING