







RoHS
Compliant
2002/95/EC

MODEL CODE



SS-24H01- GDB

REV.	ECN.	NO.	APPD.

DIMENSIONS

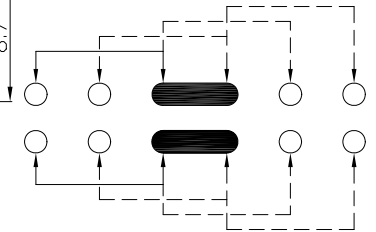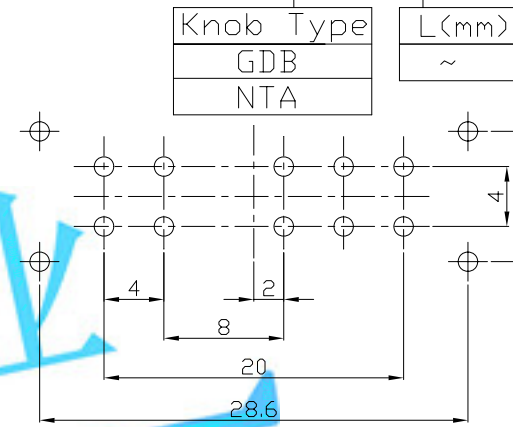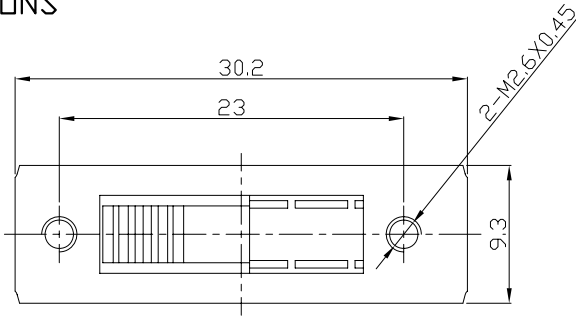

GDB Type

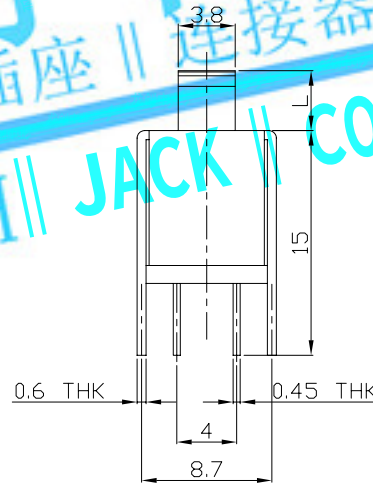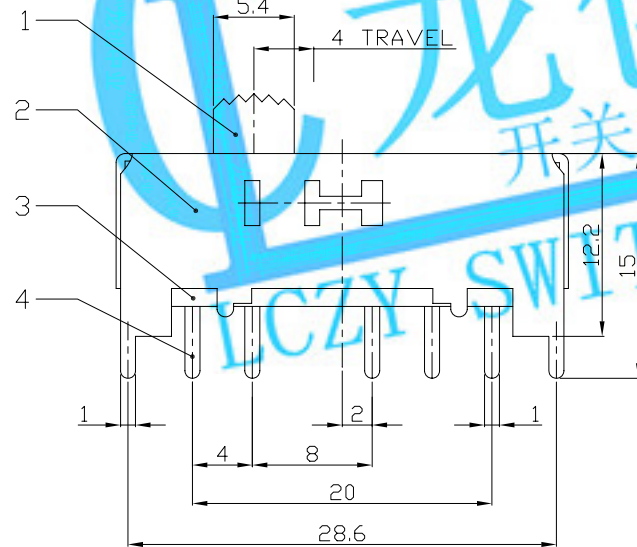

P.C.B. LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	4mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
7	STEEL BALL	STEEL	2	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L								
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO: SS-24H01					
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH	DR: Ricky 2015/10/20		DWG NO: ADL-24H01					
4	TERMINAL	BRASS STRIP	10	Ag PLATED		SEE NOTE	CHKD: Ricky 2015/10/20		SCALE	SHEET	REV.	CUSTOMER DRAWING		
3	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY	APPD:		2:1	1/1	A			
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
1	KNOB	POM	1	BLACK										
NO.	PARTS	MATERIAL	Q'TY	FINISHING										
1		2		3		4		5		6		7		