
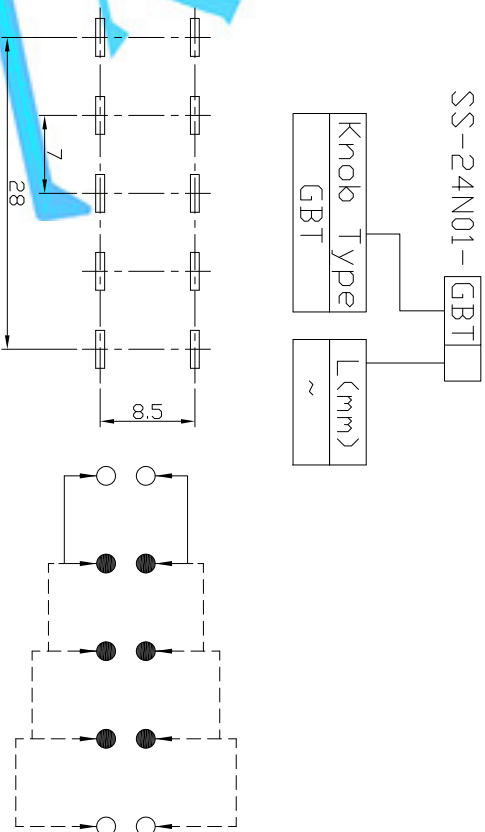
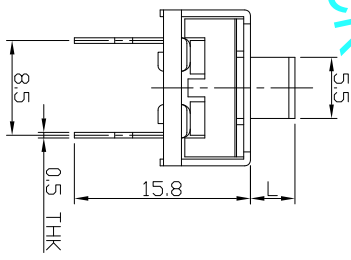


DIMENSIONS

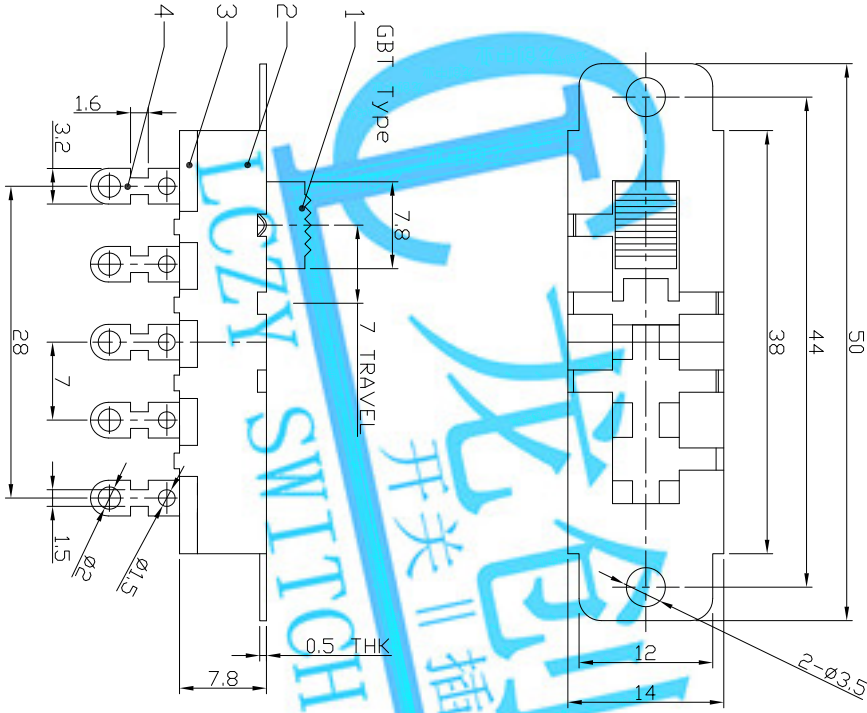

MODEL CODE

SS-24N01-GBT

PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	3A 250V AC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	7mm
OPERATING FORCE	600±200gf
OPERATING LIFE(cycles)	10,000

8	SPRING PLATE	PBS STRIP	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	CONTACT	COPPER STRIP	2	AG PLATED	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	SPRING PLATE	PBS STRIP	2	NATURAL		FINISH	SEE NOTE				
5	TERMINAL	BRASS STRIP	10	AG PLATED		SEE NOTE					
4	BASE	PHENOLIC RESIN	1	BLACK		DR:	Rocky 2015/05/29	DWG NO.:	ADL-24N01	CUSTOMER DRAWING	
3	FRAME	STEEL STRIP	1	Zn PLATED		CHKD:	Rocky 2015/05/29	SCALE	SHEET 1/1		
2	KNDB	PAG6	1	BLACK		Q'TY		REV.			
1	PARTS	MATERIAL	Q'TY	FINISHING		APPD:					