



RoHS
Compliant
2002/95/EC





MODEL CODE

SS-42D02-GEE



Knob Type
GEE
VAC

L(mm)
~

DIMENSIONS

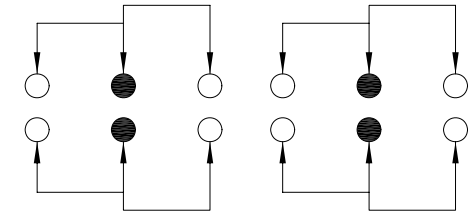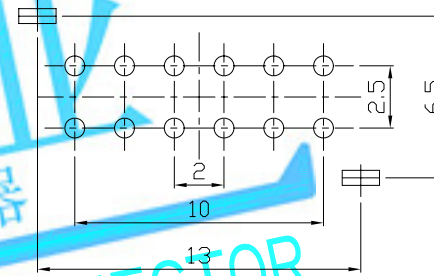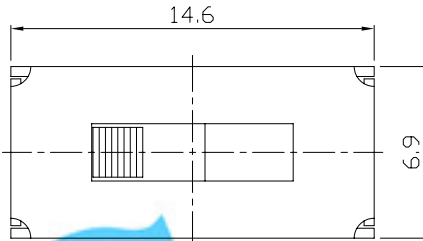

CIRCUIT DIAGRAM

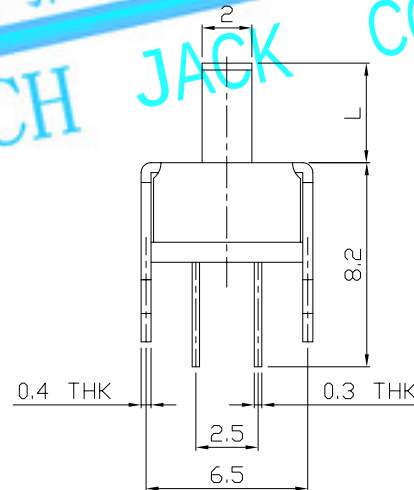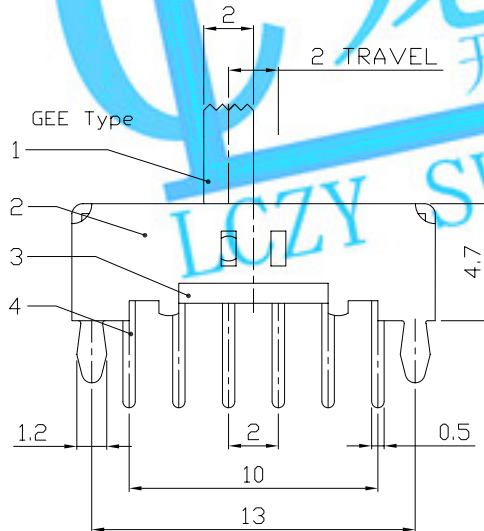

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7					OVER 1.5mm: ±0.2mm	MAT'L						
6	SPRING PLATE	STAINLESS STEEL	2	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-42D02			
5	CONTACT CLIP	PBS C5210R-EH	4	Ag CLAD			DR: <i>Ricky</i> 2015/06/10		DWG NO.: ADJ-42D02			
4	TERMINAL	BRASS STRIP	12	Ag PLATED OVER Ni PLATED			CHKD: <i>Ricky</i> 2015/06/10		SCALE	SHEET	REV.	CUSTOMER DRAWING
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH	APPD:		3:1	1/1	A	
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE						
1	KNOB	POM	1	BLACK		Q'TY						
NO.	PARTS	MATERIAL	Q'TY	FINISHING								