



RoHS
Compliant
2002/95/EC





MODEL CODE

SS-42D03-GEE

Knob Type
GEE
VAC



L(mm)
~

DIMENSIONS

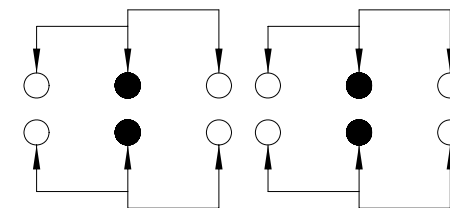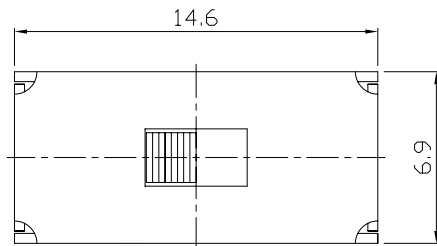

P.C.B. LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

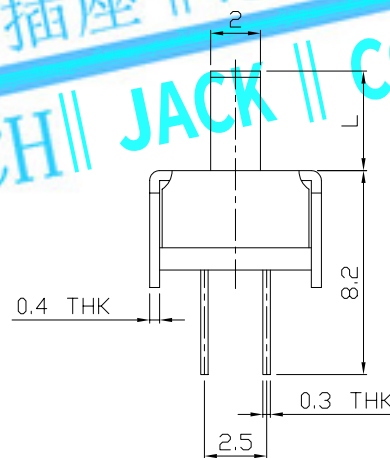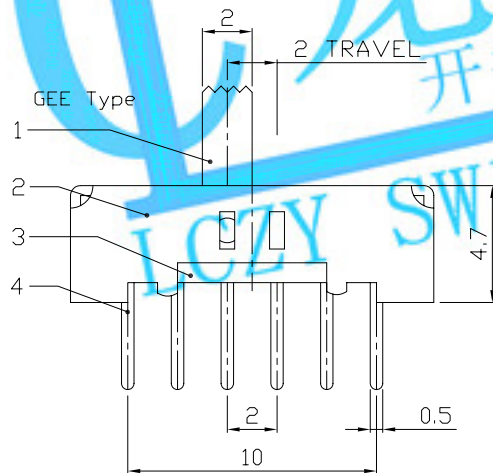

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					
7					
6	CONTACT CLIP	PBS C5210R-EH	4	Ag CLAD	
5	SPRING PLATE	SUS	2	NATURAL	
4	TERMINAL	BRASS STRIP	12	Ag PLATED OVER Ni PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm
SEE NOTE
SEE NOTE
Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm
MAT'L
FINISH
Q'TY
SEE NOTE

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-42D03	
DR: Ricky 2015/06/10		DWG NO.: ADJ-42D03	
CHKD: Ricky 2015/06/10		SCALE SHEET REV. CUSTOMER DRAWING	
APPD:		3:1	1/1 A