
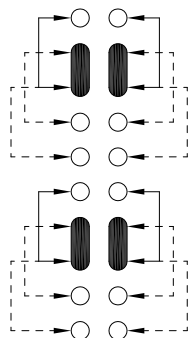
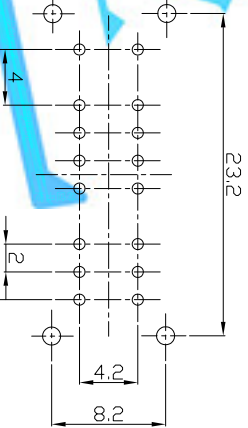
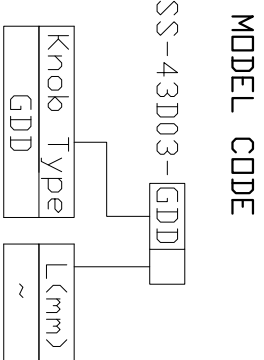
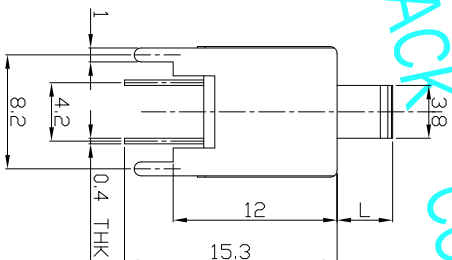
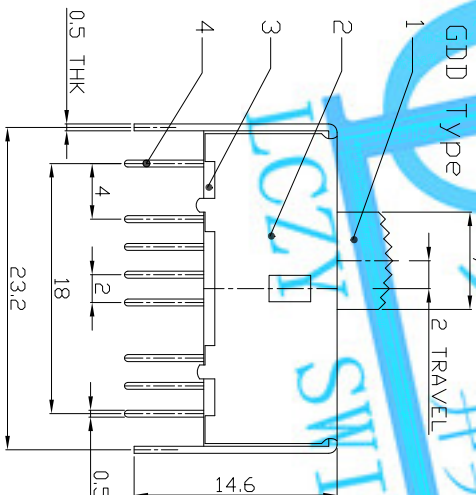


DIMENSIONS

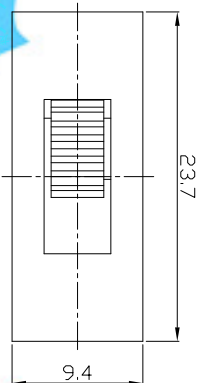

PCB LAYOUT

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	STEEL BALL	STEEL	2	NATURAL		MAT'L					
6	SPRING	STEEL WIRE	1	NATURAL							
5	CONTACT CLIP	PBS STRIP	4	AG PLATED							
4	TERMINAL	BRASS STRIP	16	AG PLATED							
3	BASE	PHENOLIC RESIN	1	NATURAL	FINISH						
2	FRAME	STEEL STRIP	1	NI PLATED	SEE NOTE						
1	KNDB	PDM	1	BLACK	Q'TY						
ND.	PARTS	MATERIAL	Q'TY	FINISHING							
											
											