

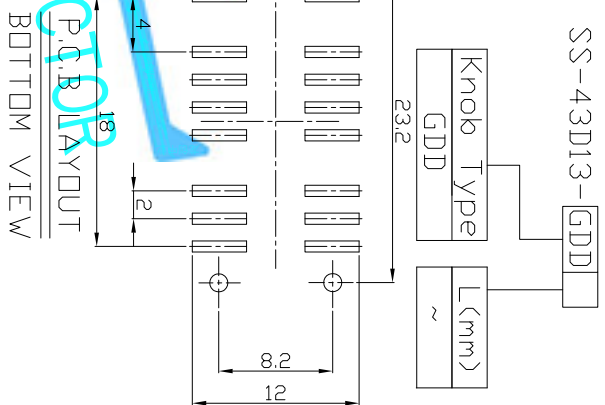
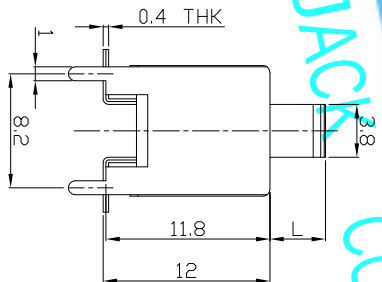


DIMENSIONS

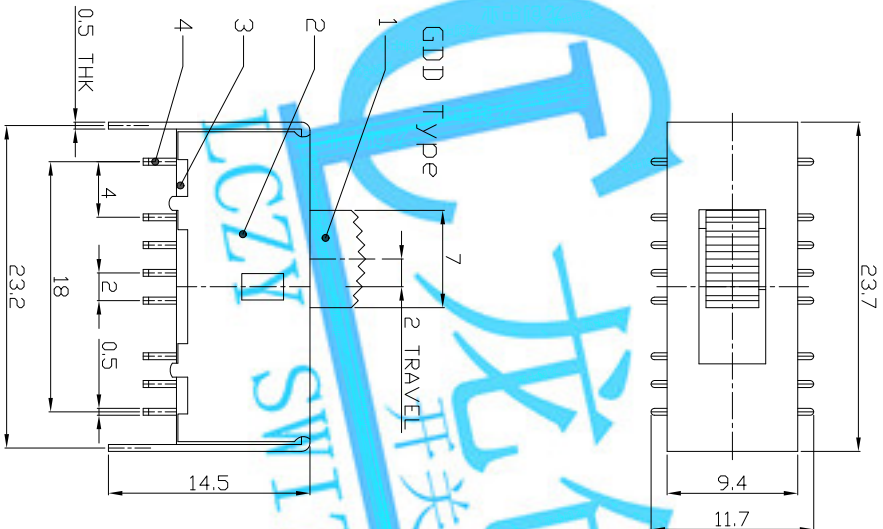

CIRCUIT DIAGRAM

P.C.B. LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED TITLE: SLIDE SWITCH / VERTICAL PART NO.: SS-43D13 DWG NO.: ADL-43D13 SCALE: 1/1 REV.: CUSTOMER DRAWING			
7	SPRING	STEEL WIRE	1	NATURAL	SEE NOTE	MAT'L				
6	CONTACT CLIP	PBS STRIP	4	Ag PLATED	SEE NOTE	FINISH				
5	CONTACT CLIP	PBS STRIP	4	Ag PLATED	SEE NOTE	FINISH				
4	TERMINAL	BRASS STRIP	16	Ag PLATED	SEE NOTE	FINISH				
3	BASE	PHENOLIC RESIN	1	NATURAL	DR: Rocky 2015/10/21	DR: Rocky 2015/10/21	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			
2	FRAME	STEEL STRIP	1	NI PLATED	CHKD: Rocky 2015/10/21	CHKD: Rocky 2015/10/21				
1	KNDB	PDM	1	BLACK	Q'TY	Q'TY				
ND.	PARTS	MATERIAL	Q'TY	FINISHING	APPD:	APPD:				