

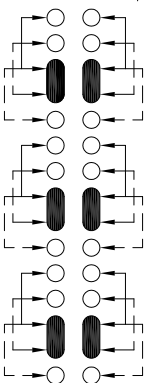
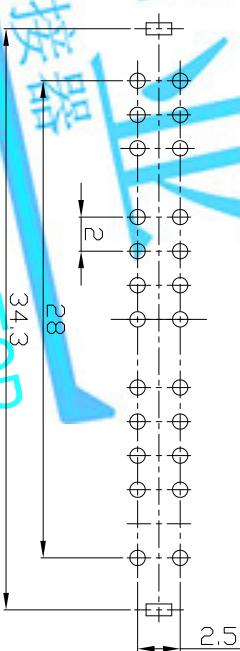
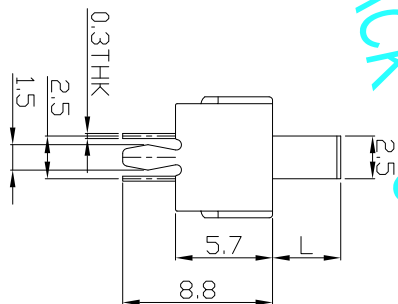


DIMENSIONS

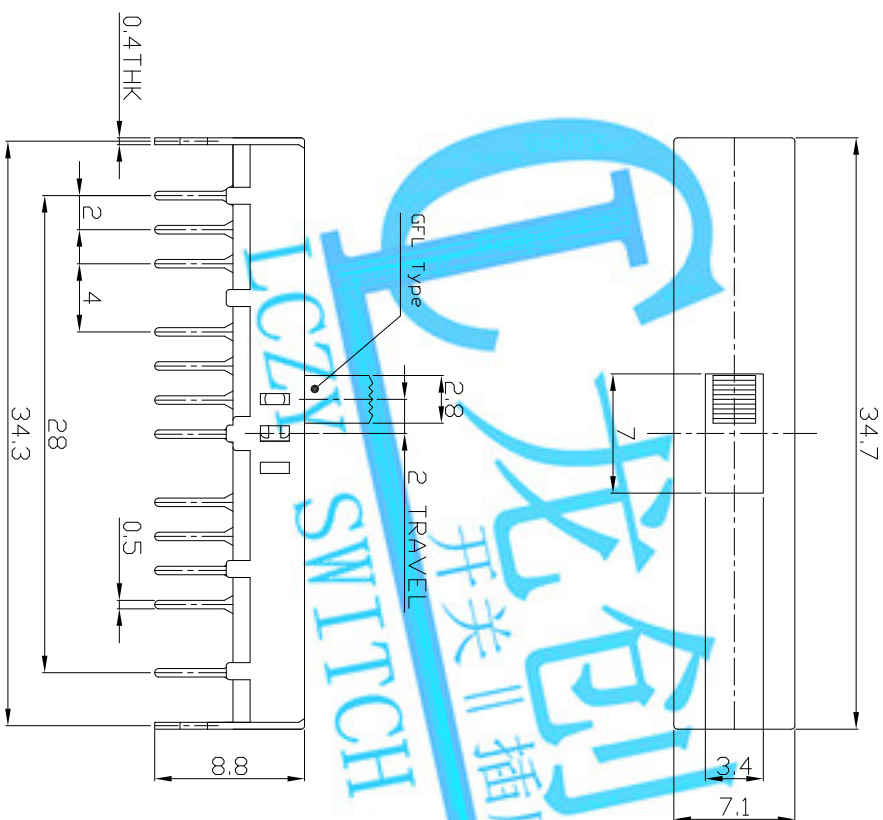

MODEL CODE

SS-63D08-GFL



P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	6P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	350±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm					
6	SPRING PLATE	PBS STRIP	2	NATURAL		SEE NOTE				
5	CONTACT CLIP	PBS C5210R-EH	6	Ag CLAD						
4	TERMINAL	BRASS STRIP	24	Ag PLATED		FINISH				
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	DR: Ricky 2016/02/18	DWG NO: ADL-63D08	SCALE	REV.
2	FRAME	STEEL STRIP	1	NI PLATED		Q'TY	CHKD: Ricky 2016/02/18	1/1	A	CUSTOMER DRAWING
1	KNDB	POM	1	BLACK		Q'TY	APPD:			
ND	PARTS	MATERIAL	Q'TY	FINISHING						