





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

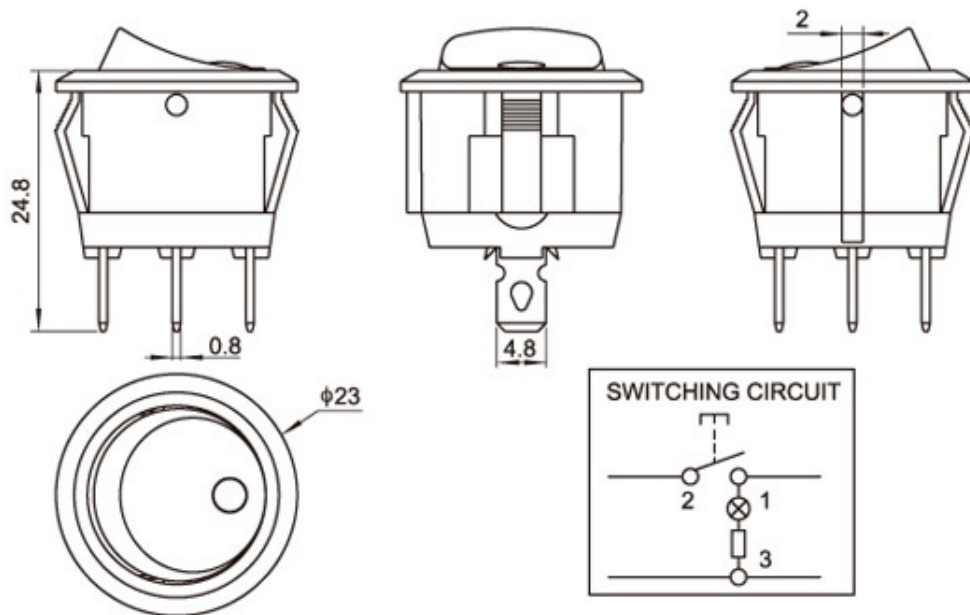

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	20~20.1	2.1~2.2
1.25~2.00	20.1~20.2	2.1~2.2
2.00~3.00	20.2~20.3	2.1~2.2



技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		10(6)A	250V
绝缘电阻 Insulated resistance		≥100MΩ	
接触电阻 Contact resistance		≤50mΩ	
介电强度(极间) Dielectric strength		≥1500VAC/5S	
电器寿命 Endurance		≥10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
7						MAT'L									
6						SEE NOTE		TITLE:		PART NO.:					
5								Rocker Switch							
4						FINISH		DR:		DWG NO.:					
3						SEE NOTE				RS601C-101N0171BB					
2						Q'TY	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	CHKD:		SCALE			SHEET	REV.	CUSTOMER DRAWING
1									APPD:		4:1		1/1	A	
NO.	PARTS	MATERIAL		Q'TY	FINISHING						4:1		1/1	A	