







RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

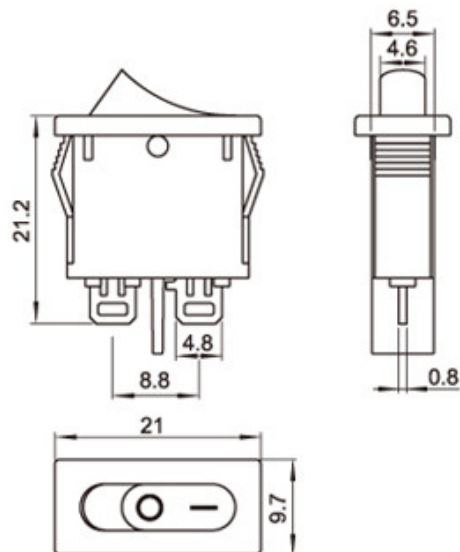

PANEL CUT-OUT		
Z	Y	X
0.70 ~ 1.25	6.5~6.7	18.9~19.1
1.25 ~ 2.00	6.5~6.7	19.1~19.2
2.00 ~ 3.00	6.5~6.7	19.3~19.4



技 术 要 求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		10(6)A	250V
绝缘电阻 Insulated resistance		≥100MΩ	
接触电阻 Contact resistance		≤50mΩ	
介电强度(极间) Dielectric strength		≥1500VAC/5S	
电器寿命 Endurance		≥10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7								MAT'L					
6								SEE NOTE	TITLE:		PART NO.:		
5								Rocker Switch					
4						FINISH		DR:	DWG NO.:		RS601D1-1010019BB		
3						SEE NOTE		CHKD:					
2						Q'TY	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	APPD:	SCALE		SHEET	REV.	CUSTOMER
1								DRAWING					
NO.	PARTS	MATERIAL		Q'TY	FINISHING				4:1	1/1	A	DRAWING	