





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

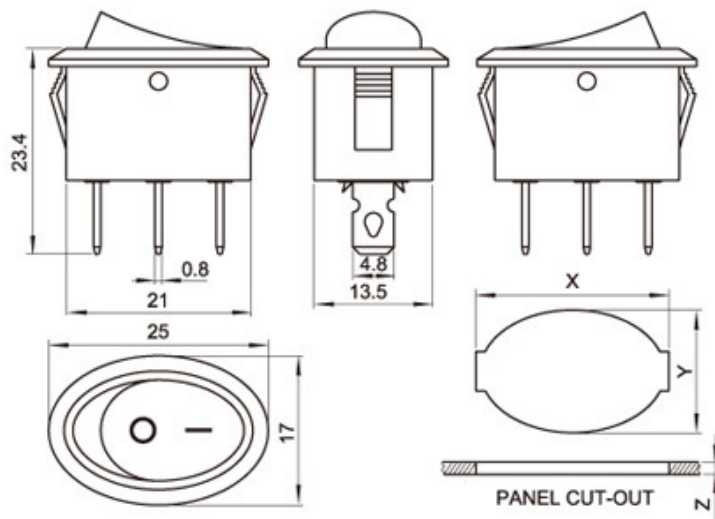

Base Type	PANEL CUT-OUT		
	Z	Y	X
RS601E 22.10	0.70 ~ 1.25	13.5~13.7	21.9~22.1
	1.25 ~ 2.00	13.5~13.7	21.9~22.1
	2.00 ~ 3.00	13.5~13.7	21.9~22.1
RS601ES 22.7	0.70 ~ 1.25	13.5~13.7	22.5~22.7
	1.25 ~ 2.00	13.5~13.7	22.7~22.9
	2.00 ~ 3.00	13.5~13.7	22.9~23.1
RS601EB 23.6	0.70 ~ 1.25	13.5~13.7	23.4~23.6
	1.25 ~ 2.00	13.5~13.7	23.6~23.8
	2.00 ~ 3.00	13.5~13.7	23.8~24



技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目 Item	参 数 Parameter
额定电流、电压 Rated voltage Rated current	10(6)A 250V
绝缘电阻 Insulated resistance	≥100MΩ
接触电阻 Contact resistance	≤50mΩ
介电强度(极间) Dielectric strength	≥1500VAC/5S
电器寿命 Endurance	≥10000 Cycles
使用温度 Ambient temperature	T 85

8						UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7						mm					
6						MAT'L					
5						SEE NOTE		TITLE:	PART NO.:		
4						FINISH	Rocker Switch				
3							SEE NOTE	DR:	DWG NO.:		
2					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	Q'TY	CHKD:	RS601E-101N011RB			
1							APPD:	SCALE	SHEET	REV.	CUSTOMER
NO.	PARTS	MATERIAL	Q'TY	FINISHING				4:1	1/1	A	DRAWING