




RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

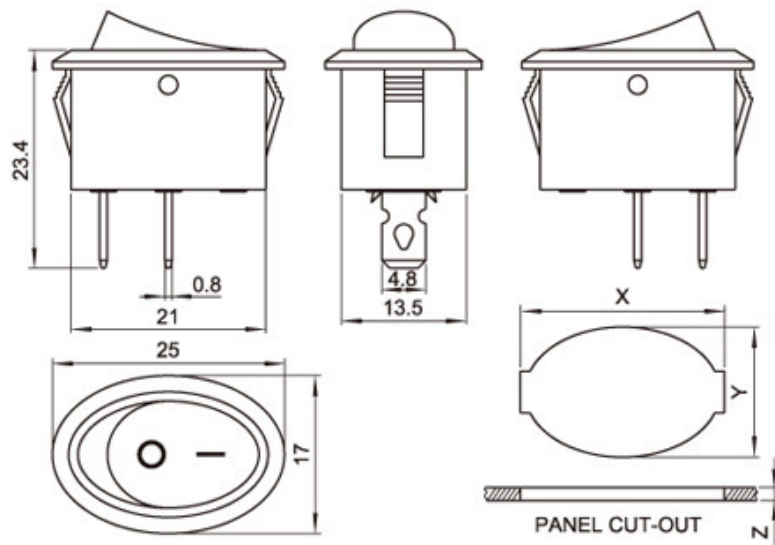

Base Type	PANEL CUT-OUT		
RS601E 22.1	Z	Y	X
	0.70 ~ 1.25	13.5~13.7	21.9~22.1
	1.25 ~ 2.00	13.5~13.7	21.9~22.1
	2.00 ~ 3.00	13.5~13.7	21.9~22.1
RS601ES 22.7	Z	Y	X
	0.70 ~ 1.25	13.5~13.7	22.5~22.7
	1.25 ~ 2.00	13.5~13.7	22.7~22.9
	2.00 ~ 3.00	13.5~13.7	22.9~23.1
RS601EB 23.6	Z	Y	X
	0.70 ~ 1.25	13.5~13.7	23.4~23.6
	1.25 ~ 2.00	13.5~13.7	23.6~23.8
	2.00 ~ 3.00	13.5~13.7	23.8~24

SWITCHING CIRCUIT

技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		10(6)A	250V
绝缘电阻 Insulated resistance		≥100MΩ	
接触电阻 Contact resistance		≤50mΩ	
介电强度(极间) Dielectric strength		≥1500VAC/5S	
电器寿命 Endurance		≥10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7						MAT'L		TITLE: Rocker Switch		PART NO.:		
6						SEE NOTE						
5						FINISH		DR:		DWG NO.:		
4							SEE NOTE					
3						Q'TY		CHKD:		RS601E-1010011BB		
2												
1								APPD:		SCALE SHEET REV. CUSTOMER 4:1 1/1 A DRAWING		
NO.	PARTS	MATERIAL	Q'TY	FINISHING								