





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

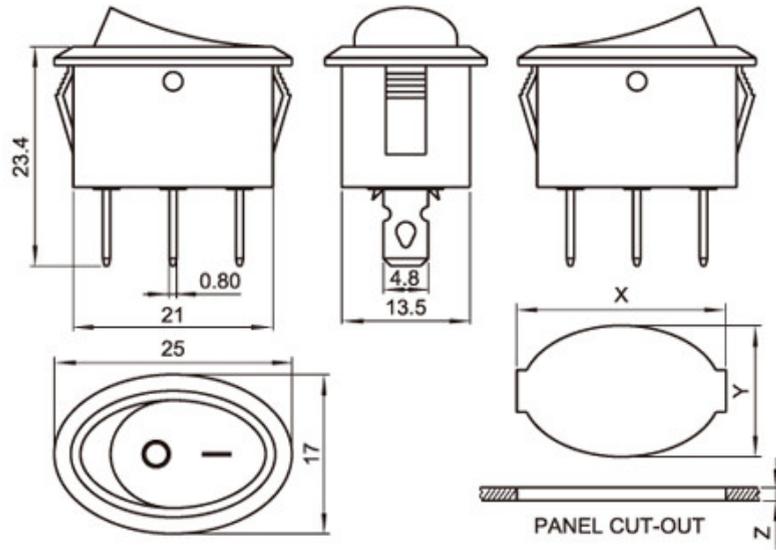

Base Type	PANEL CUT-OUT		
	Z	Y	X
RS601E 22.10	0.70 ~ 1.25	13.5~13.7	21.9~22.1
	1.25 ~ 2.00	13.5~13.7	21.9~22.1
	2.00 ~ 3.00	13.5~13.7	21.9~22.1
RS601ES 22.7	0.70 ~ 1.25	13.5~13.7	22.5~22.7
	1.25 ~ 2.00	13.5~13.7	22.7~22.9
	2.00 ~ 3.00	13.5~13.7	22.9~23.1
RS601EB 23.6	0.70 ~ 1.25	13.5~13.7	23.4~23.6
	1.25 ~ 2.00	13.5~13.7	23.6~23.8
	2.00 ~ 3.00	13.5~13.7	23.8~24



项目 Item	参数 Parameter
额定电流、电压 Rated voltage Rated current	10(6)A 250V
绝缘电阻 Insulated resistance	≥100MΩ
接触电阻 Contact resistance	≤50mΩ
介电强度(极间) Dielectric strength	≥1500VAC/5S
电器寿命 Endurance	≥10000 Cycles
使用温度 Ambient temperature	T 85

技术要求

1. 总装后表面光洁，无划伤、陷点，基座无裂痕；
2. 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7						MAT'L						
6						SEE NOTE		TITLE:	Rocker Switch			PART NO.:
5						FINISH		DR:				DWG NO.:
4						SEE NOTE		CHKD:				RS601E-1020011BB
3						Q'TY		APPD:	SCALE	SHEET	REV.	CUSTOMER
2									4:1	1/1	A	DRAWING
1												
NO.	PARTS	MATERIAL	Q'TY	FINISHING								

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE