



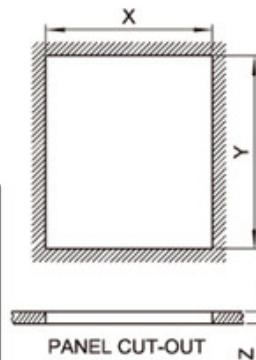

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

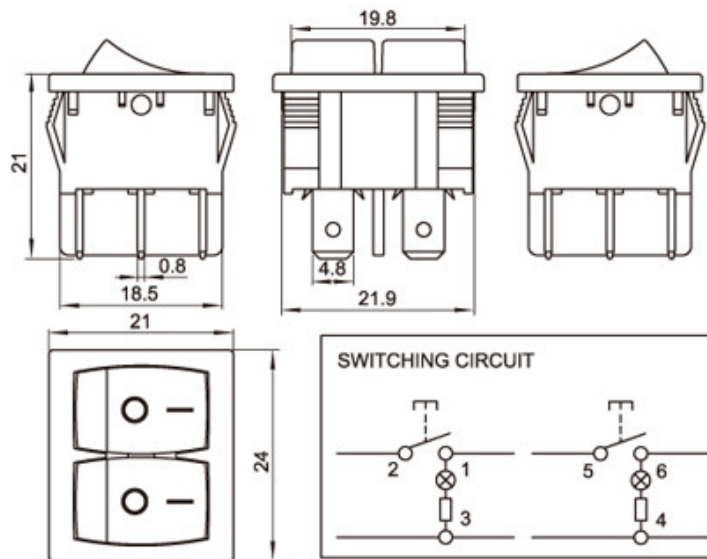

PANEL CUT-OUT		
Z	Y	X
0.75~1.25	21.9~22.1	18.9~19.1
1.25~2.00	21.9~22.1	19.1~19.2
2.00~3.00	21.9~22.1	19.3~19.4

技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		10(6)A 250V	
绝缘电阻 Insulated resistance		$\geq 100M\Omega$	
接触电阻 Contact resistance		$\leq 50m\Omega$	
介电强度(极间) Dielectric strength		$\geq 1500VAC/5S$	
电器寿命 Endurance		≥ 10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
7								MAT'L						
6								SEE NOTE	TITLE:		PART NO.:			
5								Rocker Switch						
4						FINISH		DR:	DWG NO.:		RS601F1-201N016RB			
3						SEE NOTE		CHKD:						
2					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	Q'TY		APPD:			SCALE	SHEET	REV.	CUSTOMER
1											4:1	1/1	A	DRAWING
NO.	PARTS	MATERIAL		Q'TY	FINISHING									