




RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

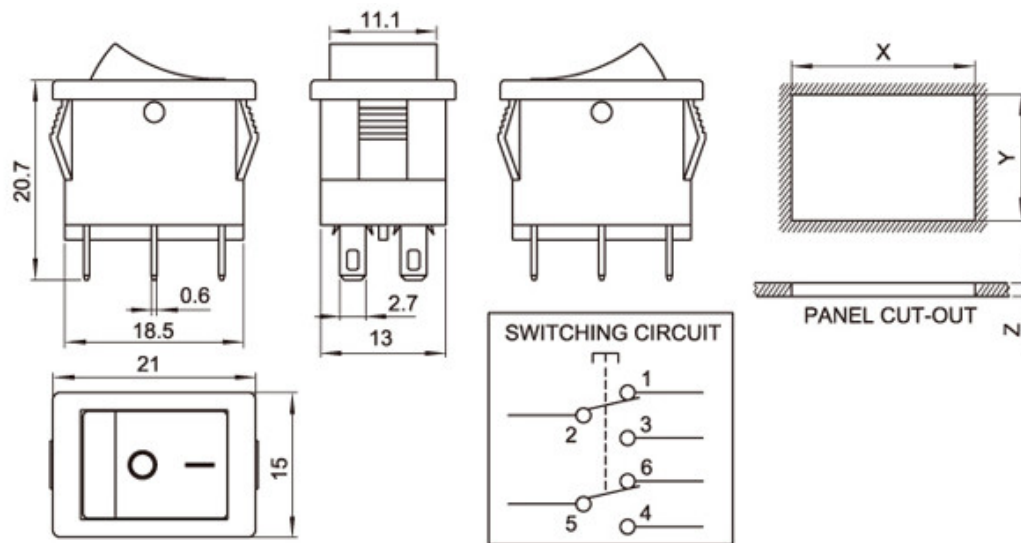

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.9~13.1	18.9~19.1
1.25~2.00	12.9~13.1	19.1~19.2
2.00~3.00	12.9~13.1	19.3~19.4

技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目 Item	参 数 Parameter
额定电流、电压 Rated voltage Rated current	10(6)A 250V
绝缘电阻 Insulated resistance	≥100MΩ
接触电阻 Contact resistance	≤50mΩ
介电强度(极间) Dielectric strength	≥1500VAC/5S
电器寿命 Endurance	≥10000 Cycles
使用温度 Ambient temperature	T 85

8							UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
7							MAT'L		mm						
6							SEE NOTE		TITLE:	PART NO.:					
5															
4							FINISH	Rocker Switch	DWG NO.:						
3							SEE NOTE						DR:	RS601G-2020018BB	
2					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE		Q'TY	CHKD:	SCALE	SHEET	REV.	CUSTOMER DRAWING			
1								APPD:	4:1	1/1	A				
NO.	PARTS	MATERIAL	Q'TY	FINISHING											