





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

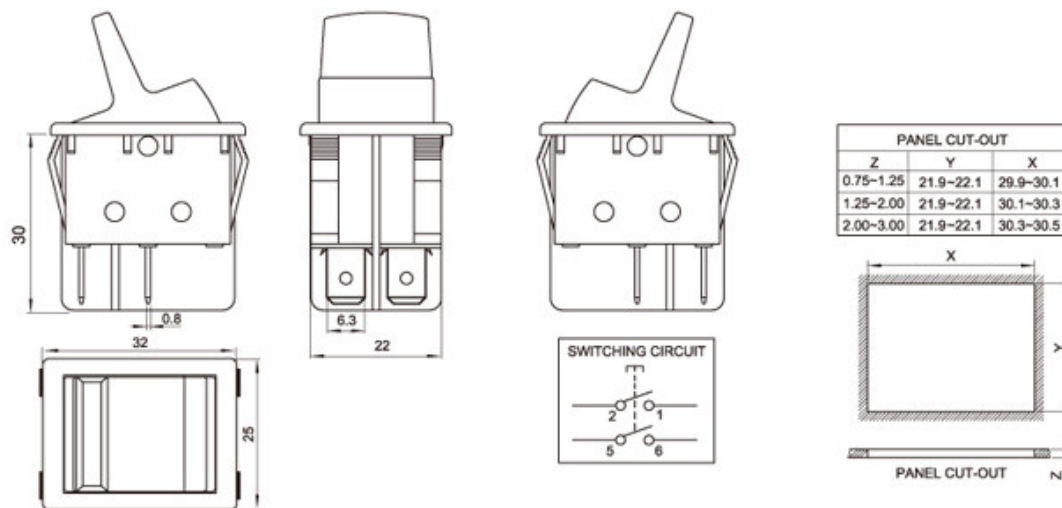

PANEL CUT-OUT		
Z	Y	X
0.75~1.25	21.9~22.1	29.9~30.1
1.25~2.00	21.9~22.1	30.1~30.3
2.00~3.00	21.9~22.1	30.3~30.5



技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目 Item	参 数 Parameter
额定电流、电压 Rated voltage Rated current	15250V20A125V
绝缘电阻 Insulated resistance	≥100MΩ
接触电阻 Contact resistance	≤50mΩ
介电强度(极间) Dielectric strength	≥1500VAC/5S
电器寿命 Endurance	≥10000 Cycles
使用温度 Ambient temperature	T 85

8						UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7						mm					
6						MAT'L	TITLE: Rocker Switch				
5						SEE NOTE					
4						FINISH	PART NO.:				
3						SEE NOTE					
2					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	DR:	DWG NO.:				
1						Q'TY					
NO.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:	SCALE	SHEET	REV.	CUSTOMER	
							4:1	1/1	A	DRAWING	