





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

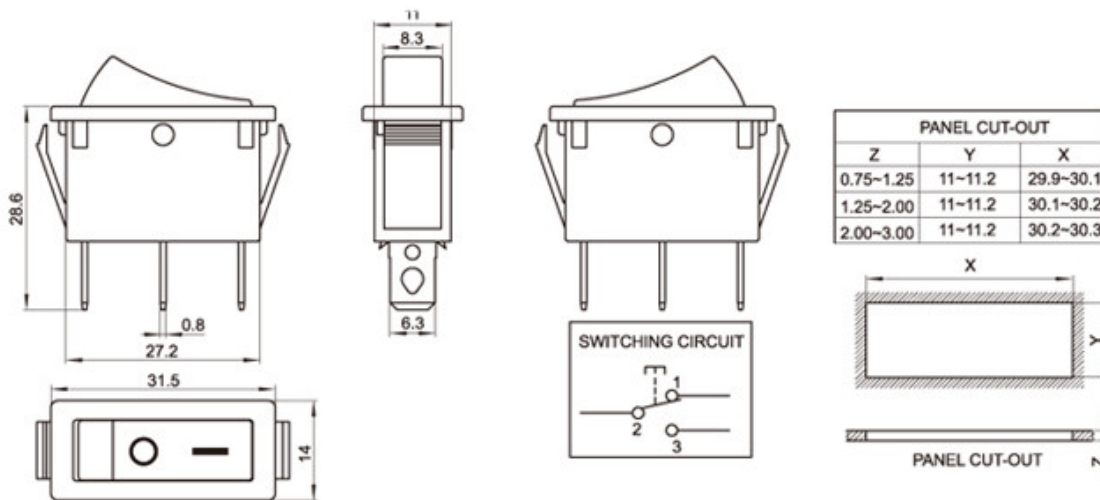

PANEL CUT-OUT		
Z	Y	X
0.75~1.25	11~11.2	29.9~30.1
1.25~2.00	11~11.2	30.1~30.2
2.00~3.00	11~11.2	30.2~30.3



技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		15250V20A125V	
绝缘电阻 Insulated resistance		≥100MΩ	
接触电阻 Contact resistance		≤50mΩ	
介电强度(极间) Dielectric strength		≥1500VAC/5S	
电器寿命 Endurance		≥10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7						mm					
6						MAT'L	Rocker Switch				
5						SEE NOTE					
4						FINISH	RS606D-1020011CBB				
3						SEE NOTE					
2						Q'TY	CUSTOMER DRAWING				
1						APPD:					
NO.	PARTS	MATERIAL	Q'TY	FINISHING			4:1	1/1	A		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE