

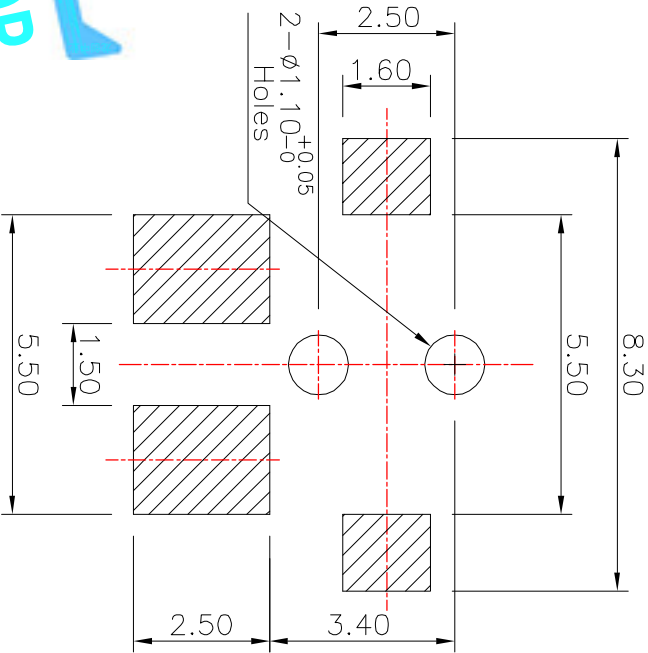


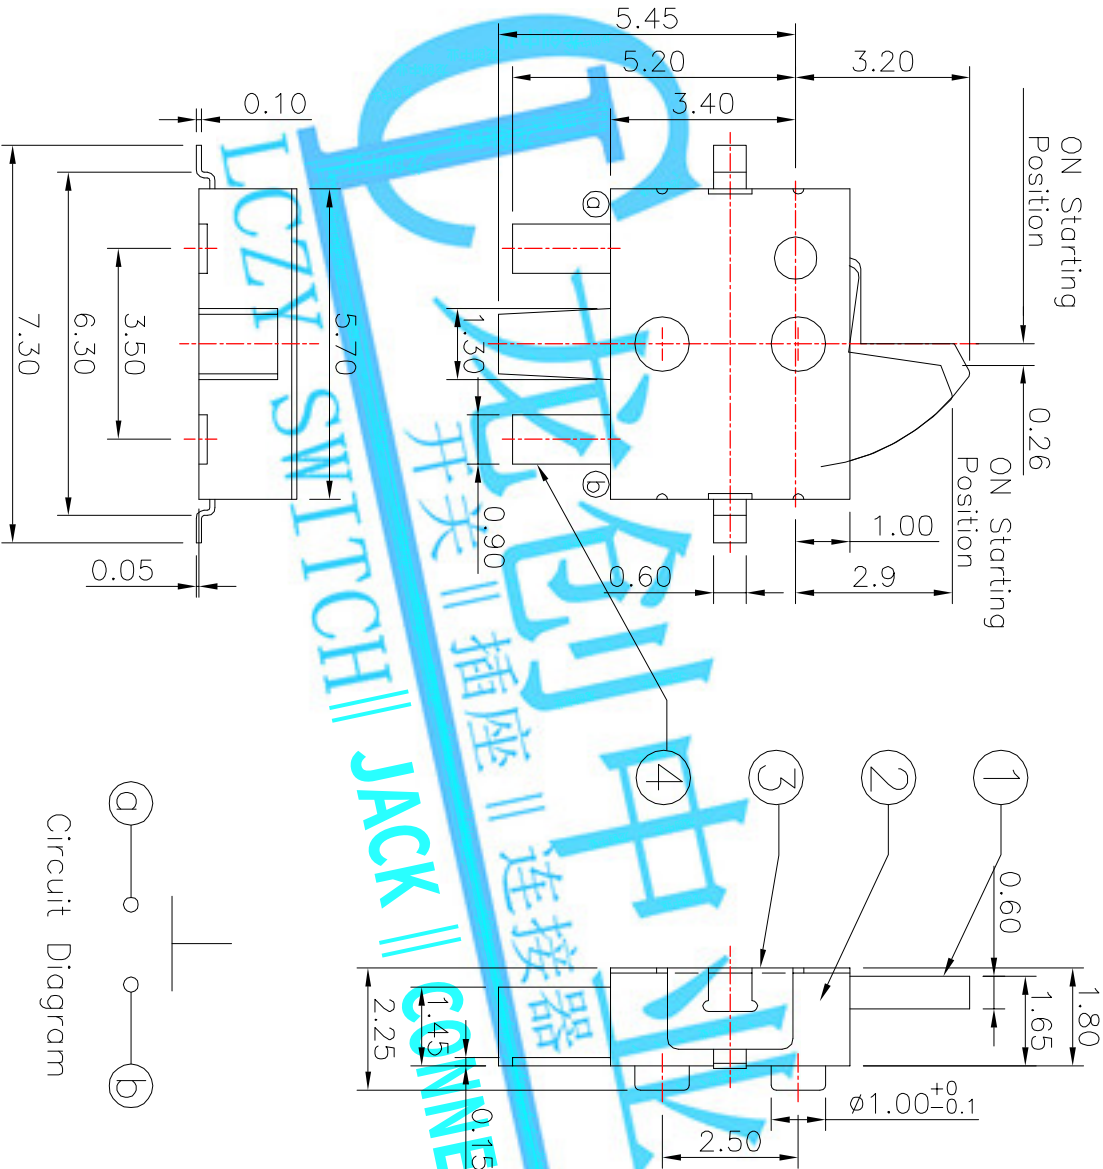

PCB Layout(Pattern side)

NOTE:
Rating: DC 30V 0.1A
Operating Force: $20\pm 10gf$
Lifetime: 50,000 Cycles



⑤	Contact Spring	—	1	Be Alloy	Ag Plated	—
④	Terminal	—	2	Phosphor Bronze	Ag Plated	—
③	Cover	—	1	SUS	Natural	—
②	Housing	—	1	LCP	Black	—
①	Slider	—	1	PA46	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
DRAWN	J.X.Zhang	2013/8/26				

CHECKED		TITLE: DETECTOR SWITCHS				
APPROVALS		PART NO.		K5-1617SA-01		
TOLERANCES ARE		30~12.7 10~30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
				±2'	DRAWING NO.	PROJ: SHEET 1 OF 1

ECN NO.	REV.	DATE.	NEW			
	A		DESCRIPTION.			
			CHANGE.	CHECK.	APPRO.	