

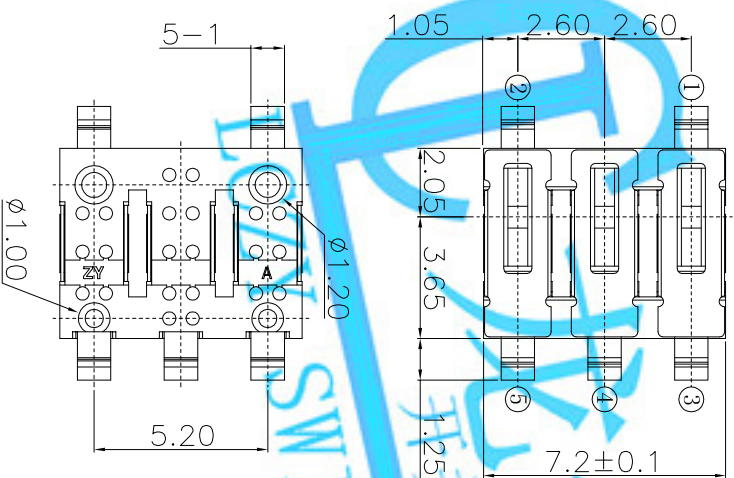
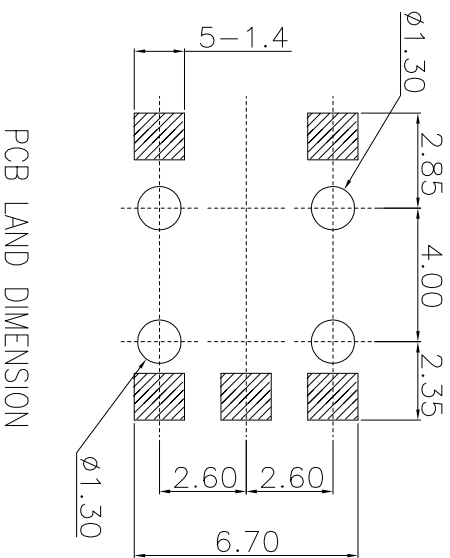
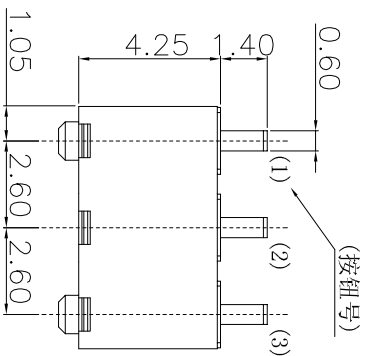


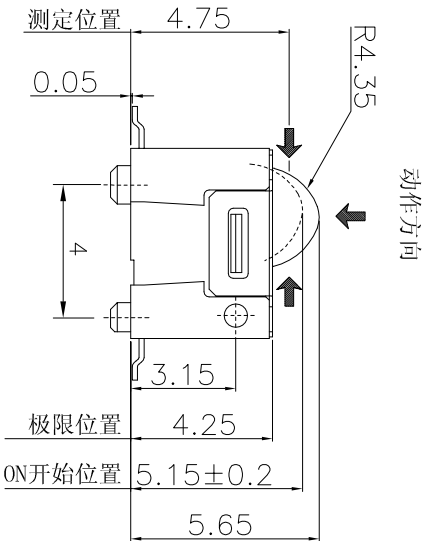

技术要求:

1. 额定负荷: DC-5V 0.1~1mA
2. 绝缘电阻: ≥100MΩ
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 50000次
5. 环境温度: -10° ~ +60°
6. 相对湿度: 40℃ ≤95%
7. 接触电阻: ≤100MΩ
8. 接触行程: 0.5±0.2
9. 动作力: ≤0.3N(31gf)
10. 各零件无明显飞边, 配合要紧密, 不得有明显松动。
11. 未注公差尺寸均按GB1804-m级精度要求。






CIRCUIT DIAGRAM

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



⑤	Contact Spring	—	1	SUS	Natural	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA66	Black	—
②	Cover	—	1	SUS	Black	—
①	Knob	—	1	POM	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	LONGCHUANG ZHONGYE (HK) CO., LIMITED				
DRAWN	J.X.Zhang	2018/8/1				

CHECKED	TITLE:					DETECTOR SWITCHS
APPROVALS	PART NO.					K5-1673SA-03
TOLERANCES ARE		30~0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			PROJ: 1 OF 1
		5~10	±0.15	±2°	DRAWING NO.	
		~5	±0.10			

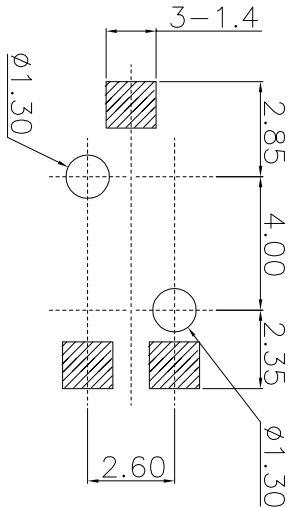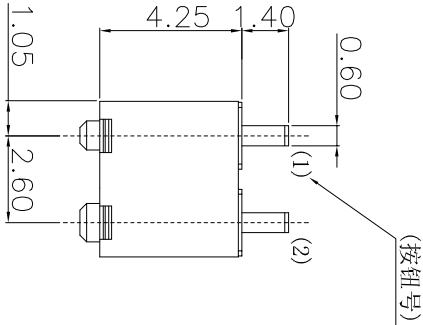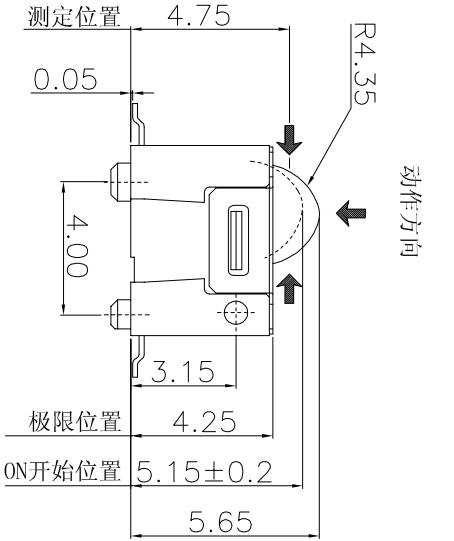


PCB LAND DIMENSION

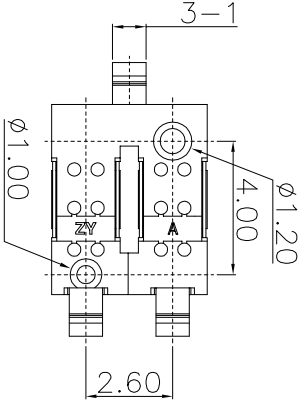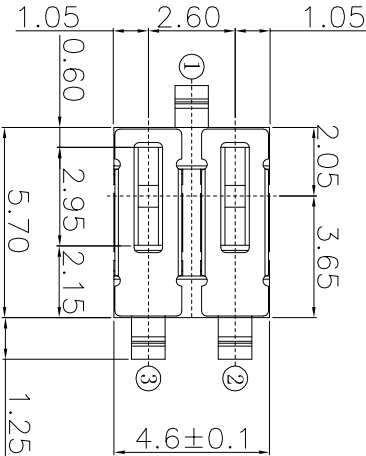

技术要求:

1. 额定负荷: DC 5V 0.1~1mA
2. 绝缘电阻: $\geq 100M\Omega$
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 50000次
5. 环境温度: $-10^{\circ}\sim+60^{\circ}$
6. 相对湿度: $40^{\circ}C \leq 95\%$
7. 接触电阻: $\leq 100M\Omega$
8. 接触行程: 0.5 ± 0.2
9. 动作力: $\leq 0.3N(31gf)$
10. 各零件无明显飞边, 配合要紧密, 不得有明显松动。
11. 未注公差尺寸均按GB1804-m级精度要求。

(按钮号)



CIRCUIT DIAGRAM

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

⑤	Contact Spring	—	1	SUS	Natural	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA66	Black	—
②	Cover	—	1	SUS	Black	—
①	Knob	—	1	POM	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	TITLE:	DETECTOR SWITCHS
DRAWN J.X.Zhang	2018/8/1	ELECTRONICS CO.,LTD	

CHECKED			
APPROVALS		PART NO.	K5-1673SA-02
TOLERANCES ARE	30~以上 10~30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE UNIT: mm SCALE: 1:1 PROJ:
		±2'	DRAWING NO.
			SHEET 1 OF 1